





















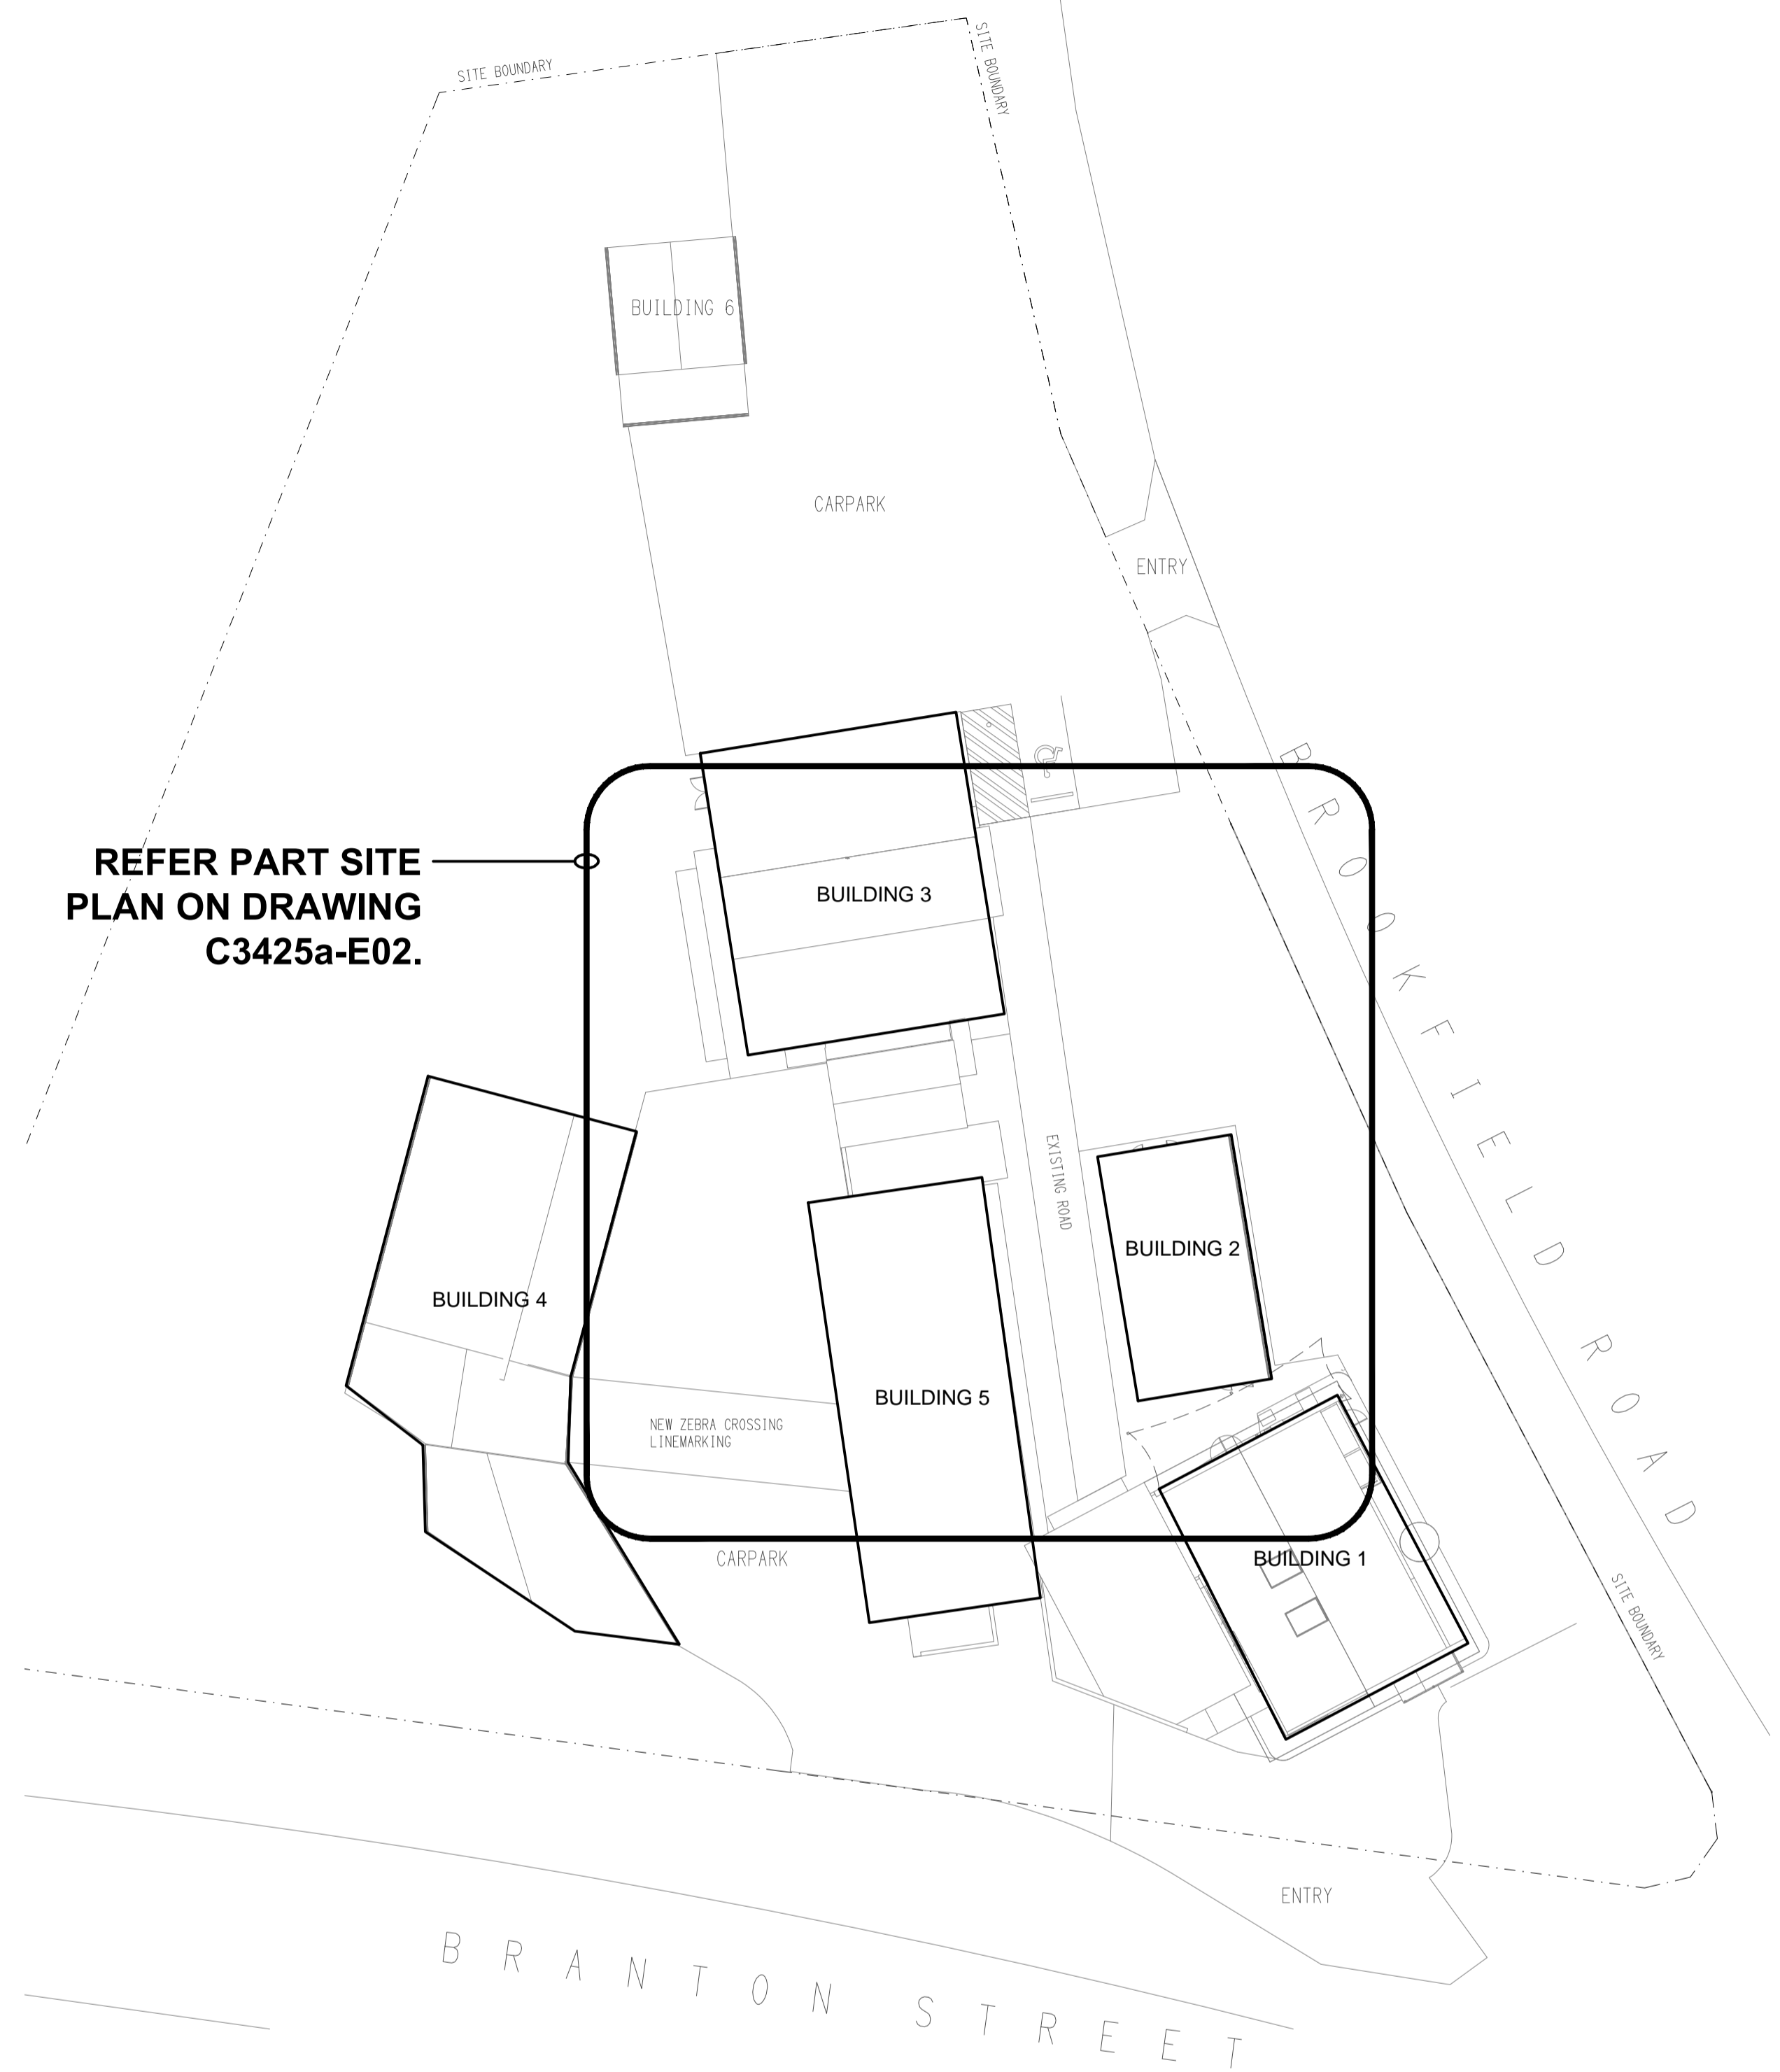


**LEGEND**

-  ELECTRICAL SERVICES SWITCHBOARD.
-  CAT-6 RJ45 OUTLET IN BUILDING 2 CABLED TO A CAT-6 RJ45 OUTLET IN BUILDING 3 VIA AN EXTERNAL GEL FILLED CAT 6 CABLE VIA THE NEW UNDERGROUND PIT AND CONDUIT SYSTEM.
-  DOUBLE 10 AMP POWER OUTLET EQUAL TO CLIPSAL WHITE 2000 SERIES MOUNTED AT 300 AFFL UNO.
-  DOUBLE 10 AMP POWER OUTLET EQUAL TO CLIPSAL WHITE 2000 SERIES MOUNTED AT 300 AFFL IN A CLIPSAL 255 HOUSING UNO.
-  SINGLE POWER OUTLET EQUAL TO CLIPSAL WHITE 2000 SERIES 10 AMP UNO. MOUNTED AT 300 AFFL UNO.
-  THREE PHASE IP66 20 AMP ISOLATOR CONNECTED TO THE EQUIPMENT VIA A FLEXIBLE SMOOTH CONDUIT. MOUNTED AT 1000 AFFL UNO.
-  SINGLE PHASE IP66 32 AMP ISOLATOR CONNECTED TO THE EQUIPMENT VIA A FLEXIBLE SMOOTH CONDUIT. MOUNTED AT 1000 AFFL UNO.
-  32 AMP SWITCH TO CONTROL THE COOK TOP. EQUAL TO CLIPSAL WHITE 2000 SERIES. MOUNTED ON OR ADJACENT THE ABOVE BENCH GPO.
-  TWO WAY LIGHT SWITCH EQUAL TO CLIPSAL WHITE 2000 SERIES. MOUNTED AT 1000 AFFL UNO.
-  TWO WAY IP66 LIGHT SWITCH. MOUNTED AT 1000 AFFL UNO.
-  CIRCUIT LINE.
-  SWITCH LINE.
-  POWER CIRCUIT DESIGNATION. DENOTES DB AND CIRCUIT.
-  E1: RECESSED NON MAINTAINED EMERGENCY LIGHT EQUAL TO CLEVERTRONICS LLIFE
-  EX: MAINTAINED EXIT LIGHT EQUAL TO CLEVERTRONICS CSBLD. CEILING SURFACE MOUNT OR WALL MOUNT BETWEEN 2100mm & 2700mm AFFL IF THERE IS NO VERTICAL SURFACE TO MOUNT THE FITTING ON WITHIN THIS RANGE CONFIRM THE MOUNTING HEIGHT WITH THE ENGINEER.
-  L1: 1200 SURFACE MOUNTED IP65 4000K LED BATTEN C/W INTEGRAL DRIVER. EQUAL TO MELEC ML-MRWPB-120-M
-  L2: 300 x 1200 SURFACE MOUNTED 4000K LED FLAT PANEL TROFFER C/W REMOTE DRIVER. EQUAL TO MELEC MRBPV3-12X3-M + ML-UNI-12x3-SMT
-  L3: RECESSED 4000K IP54 LED DOWNLIGHT C/W REMOTE DRIVER. EQUAL TO MELEC ML-MR13-MULTI-XC.
-  L4: SINGLE HEAD ADJUSTABLE IP54 4000K 12W LED SENSOR LIGHT MOUNTED AT HIGH LEVEL. EQUAL TO MELEC ML-APEXSSN-M-BL.
-  L5: TWIN HEAD ADJUSTABLE IP54 4000K 2 x 12W LED SENSOR LIGHT MOUNTED AT HIGH LEVEL. EQUAL TO MELEC ML-APEXDSN-M-BL.
-  F1: THREE BLADE 1,200 DIA CEILING FAN C/W ALUMINIUM BLADES AND AN ADJUSTABLE MOUNT SO THE FAN HANGS VERTICAL. EQUAL TO CLIPSAL P3HS1200AL-WE.
-  CEILING FAN ON/OFF-SPEED CONTROLLER AS RECOMMENDED BY THE CEILING FAN MANUFACTURER. FACEPLATE EQUAL TO CLIPSAL WHITE 2000 SERIES. MOUNTED AT 1000 AFFL UNO.



**OVERALL SITE PLAN**  
 KENMORE COMMUNITY CENTRE UPGRADES  
 SCALE 1:250

ELECTRICAL DESIGN GROUP BRISBANE  
 PTY LTD  
 ACN 092 710 793  
 TRADING AS:  
 ELECTRICAL DESIGN GROUP

THE COPYRIGHT OF THIS DRAWING  
 REMAINS THE PROPERTY OF THE  
 ELECTRICAL DESIGN GROUP.  
 USE FIGURED DIMENSIONS  
 IN PREFERENCE TO SCALE.  
 ALL DIMENSIONS TO BE  
 VERIFIED ONSITE.

**ELECTRICAL DESIGN GROUP**  
 ELECTRICAL BUILDING SERVICES CONSULTANTS  
 BRISBANE GOLD COAST  
 P.O.Box 15, Sherwood Q.4075  
 Phone: (07) 3278 4375  
 Email: brisbane@edg.net.au  
 Web: www.edg.net.au

PROJECT:  
**KENMORE COMMUNITY CENTRE**  
 98 BROOKFIELD ROAD, KENMORE HILLS

C	TENDER	06/02/2025
REV:	DESCRIPTION:	DATE:
DRAWING: <b>ELECTRICAL SERVICES LEGEND &amp; OVERALL SITE PLAN</b>		
SCALE: 1:250	AT A1	PROJECT NO: <b>C3425a</b>
		DRAWING NO: <b>E01</b>
		REVISION: <b>C</b>