





## STRADBROKE

### ARCHITECTURAL PIN HOLE DIMMABLE LED DOWNLIGHT

#### R1077

- 6w / 9w / 12w / 15w
- 2700k / 3000k / 4000k
- White Trim
- 75mm Cutout

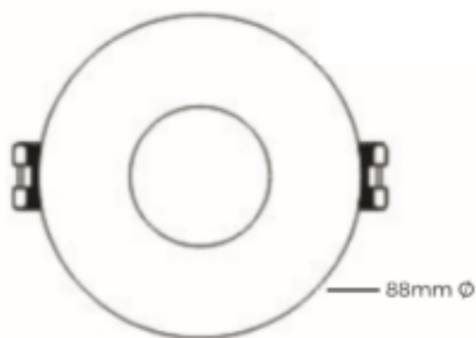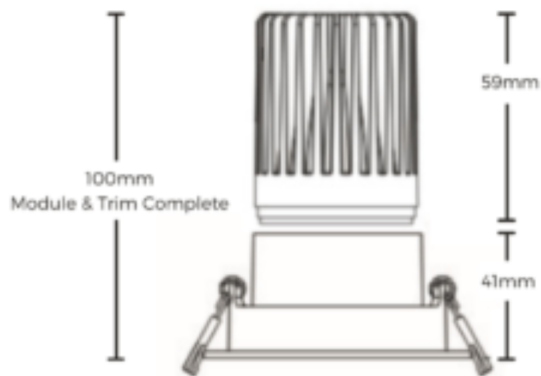



## PRODUCT SPECIFICATIONS

|                    |  |
|--------------------|--|
| Wattage            | 6W, 9W, 12W, 15W   |
| Colour Temperature | 2700K - XW, 3000K - WW,<br>4000K - CW  |
| Lumen Output       | 6W : 600 - 710Lm<br>9W : 750 - 860Lm<br>12W : 1,030 - 1,230Lm<br>15W : 1,230 - 1,380Lm |
| Lumen Output / W   | 76 - 98Lm / W  |
| CRI                | >90  |
| Beam Angle°        | 24°, 60°   |
| Fixture Colour     | White  |
| IP Rating          | IP54   |
| IC4 Rated          | Yes  |
| Dimmable           | Yes  |
| LED Type           | CREE COB LED   |
| SDCM               | <3   |
| UGR                | <16  |
| LM80               | L70 >54,000Hrs   |
| Power Supply       | Remote Class II Flicker Free<br>Driver   |
| Power Factor       | 0.90   |
| Voltage            | 200 - 240V AC  |
| Frequency          | 50 - 60Hz  |

|                                      |   |
|--------------------------------------|---|
| Working Temperature                  | -20°C ~+ 50°C   |
| Cutout                               | 75mm  |
| Product Dimensions                   | 6W / 9W / 12W : 100mm (H) x<br>88mm Ø<br>15W : 123mm (H) x 88mm Ø   |
| Product Materials                    | Trim : Powder Coated<br>Aluminium<br>Module : Die-Cast Aluminium  |
| Fitting Protection<br>Classification | Class II  |
| Options Available                    | DALI / DSI Dimming  |
| Indent Options                       | 38° Beam Angle<br>6W / 9W / 15W in 2700K  |
| Mounting Options                     | Recessed  |
| Components                           | Fitting Supplied As Module<br>and Downlight Head<br>Separately  |
| Recommended Application              | Residential & Commercial<br>For more information please<br>visit the Warranty & Returns<br>page on the Rapid LED<br>website |
| Warranty                             | 5 Years<br>(2 Years Replacement & Labour<br>/ 3 Years Replacement Only)   |
| Standards                            | AS/NZS 60598.1<br>AS/NZS 60598.2.2<br>AS/NZS 61347.1<br>AS/NZS 61347.2.13<br>AS CISPR 15                                    |