

LED COMMERCIAL EXTERIOR LIGHTS




www.sal.net.au

LED STREET LIGHTS SHP305, SHP306 DRIVE

IP66



DIMENSIONS



CONSTRUCTION

- Die-cast aluminium body
- Powder coated finish
- Tempered glass front cover
- IP67 high power factor MEANWELL® LED driver fitted
- Lightweight heat sink maintaining efficient heat dissipation
- Asymmetrical light distribution (TYPE II) fitted
- 0% upward light ratio

COLOUR TEMPERATURE

- 4000K Cool White (standard)
- 3000K Warm White (option)
- 6000K Daylight (option)

DIMMING OPTIONS

- Built-in 3-in-1 dimming function on 10VDC, PWM signal
- SMART timer dimming

LENS OPTIONS (Refer to Photometric data below)

- SHP305A75/P standard fitted
- SHP305A45/P lens option
- SHP306A45/P standard fitted
- SHP306A75/P lens option

ACCESSORIES INCLUDED

- Ø 60 mm pole mounting bracket

ACCESSORIES OPTION

- Light sensor

IP RATING

- IP66 weatherproof

IK RATING


- IK08 impact resistance

APPLICATIONS

- Streets, parks, car parks, driveways, pathways

Model No.	Input	Power	Lumen	CCT	CRI	Fitting Colour	Weight	Dimensions (L x W x H)
SHP305/70CW/BK	240V	70W	120lm/W	4000K	>70	Black	9.2 kg	763 x 352 x 167 mm
SHP305/90CW/BK	240V	90W	120lm/W	4000K	>70	Black	9.2 kg	763 x 352 x 167 mm
SHP305/120CW/BK	240V	120W	120lm/W	4000K	>70	Black	9.2 kg	763 x 352 x 167 mm
SHP305/150CW/BK	240V	150W	120lm/W	4000K	>70	Black	9.2 kg	763 x 352 x 167 mm
SHP305/180CW/BK	240V	180W	120lm/W	4000K	>70	Black	9.2 kg	763 x 352 x 167 mm
SHP306/30CW/BK	240V	30W	120lm/W	4000K	>70	Black	6.8 kg	680 x 282 x 159 mm
SHP306/50CW/BK	240V	50W	120lm/W	4000K	>70	Black	6.8 kg	680 x 282 x 159 mm
SHP306/70CW/BK	240V	70W	120lm/W	4000K	>70	Black	6.8 kg	680 x 282 x 159 mm
SHP306/90CW/BK	240V	90W	120lm/W	4000K	>70	Black	6.8 kg	680 x 282 x 159 mm

PHOTOMETRIC DATA UNIT: cd, C0/C180 — C90/270 —

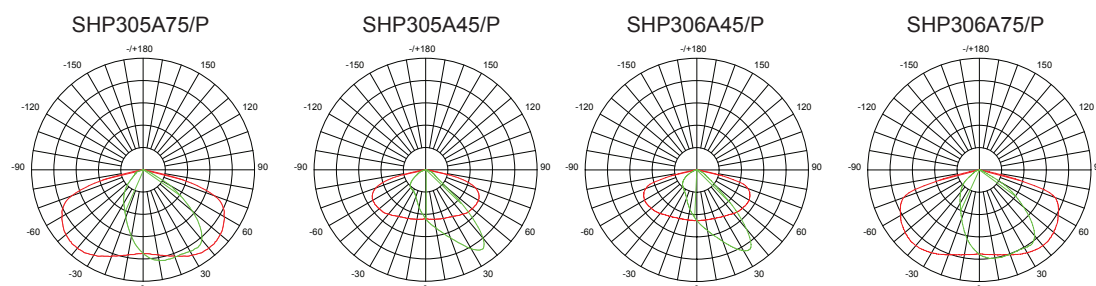

TYPE II, MEDIUM APPLICATION:

- Double driveway
- Driveway entrance
- Urban main roads

