



Festoon Cable

24 V / COMMERCIAL GRADE

- | | | | | | | | | |
|---|---|---|---|---|---|---|--|---|
|  |  |  |  |  |  |  |  |  |
| INDOOR
OUTDOOR | UV
STABILISED | 24V EXTRA
LOW VOLTAGE | OUTDOOR
IP RATED | 2 YEAR
WARRANTY | COMMERCIAL
GRADE | VANDAL
RESISTANT | GREEN
FRIENDLY | AUSTRALIAN
DESIGNED |

Flat Festoon Cable

Flat Festoon Cable – FC1

24V COMMERCIAL GRADE



FIREFLY LIGHTING

Phone +61 7 3254 4333

Email sales@fireflylighting.com.au


Address 9/29 Links Ave North, Eagle Farm.

Brisbane QLD 4009 Australia

www.fireflylighting.com.au

Firefly Lighting's Flat Festoon Cable is designed for permanent installations. Each lamp holder is factory moulded to a flat self-leveling heavy-duty cable and with a clever weatherproof flange keeps the lamp bases free from moisture and salt air. The cable is self-supporting up to 7 meters. Please use a catenary wire if your run exceeds 7 meters securing the light string with UV rated zip ties. Please see page 5 for installation suggestions.

Product sold per meter. For Lamp Holder Spacing see configurations below.

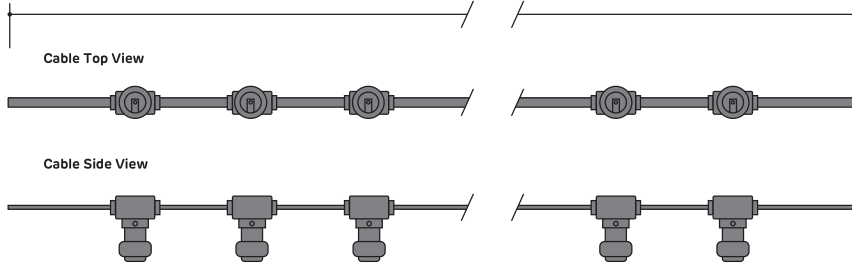

Black Spacing Configurations available

40cm | 50cm | 90cm | 150cm

White Spacing Configurations available


50cm | 90cm




Socket Top View



Socket Side View



Cable End View



Positive

Brown Sheath meets
Red Transformer Terminal

Negative

Blue Sheath meets
Black Transformer Terminal

Product Code	FC1-40	FC1-50-BL	FC1-50-WH	FC1-90-BL	FC1-90-WH	FC1-150
Lamp Holder Spacing	40cm	50cm		90cm		150cm
Lamp Holders per metre	2.5	2		1.1		0.6
Cable Colour	Black	Black	White	Black	White	Black
Roll Length	50m	100m		100m		50m
Weight per metre (approx.)	280g	220g		150g		180g

Protection Class	Class II
Core Cables	2x1.5mm ² VDE
Insulation	PVC/ABS
Core Colours	Blue (-), Brown (+)
Operating Voltage	24V
Rated Frequency	50Hz - 60Hz
Cable Width	12mm
Cable Height	4.5mm
Lamp Holder Type	E27

