

4130

DUEX



SPECIFICATIONS:



0.4 kg

3K and 4K

5K

84x90

SELV

IP54

CE

5

Year warranty

Made in Australia

CONSTRUCTION & DESIGN

- Recessed LED exterior wall light
- Constructed in AISI 316 stainless steel with brushed finish
- Optional front trims of solid brass or solid copper
- Frosted lens, neoprene rubber seals and stainless steel fasteners provide IP54 weather protection
- Integral constant current controller immune to voltage drop

OPTICAL & THERMAL PERFORMANCE

- LED thermal management incorporates conduction to transfer heat rapidly away from LED source with optimal performance
- Soft diffused illumination

ELECTRICAL SYSTEM

- **Input voltage 24V DC:** Connects to remote 24V DC power supply (TO BE ORDERED SEPARATELY)
- Supplied with 200mm input cable
- Parallel connection


TECHNICAL PERFORMANCE

- 3.9W power consumption
- >65,000 hours lifespan (L70)
- Premium quality LED Module with high lumen output per watt
- Chromaticity tolerance (macAdam step) - 2
- Available in 3K, 4K or 5K colour temperature with low colour shift over time

CODE ORDERING GUIDE: Example: 4130-3K-24V-28
4130-3K-24V/DALI-28


PRODUCT CODE	DIM CODE	COLOUR CODE
SYSTEM POWER	COLOUR TEMP.	76° BEAM ANGLE
		HOT LED LUMENS
		LUMINAIRE LUMEN OUTPUT
		76°
3.9W	3K	4130-3K-24V
	4K	4130-4K-24V
	5K	4130-5K-24V

DIM CODE	3.9W	COLOUR CODE
/DALI Dali Dimming / Switch Dim	✓	-23 Solid Brass
/DSI Digital Dimming	✓	-28 Brushed Stainless Steel
/AD Analogue Dimming 1-10V	✓	-35 Solid Copper
Non-dimmable	Std	

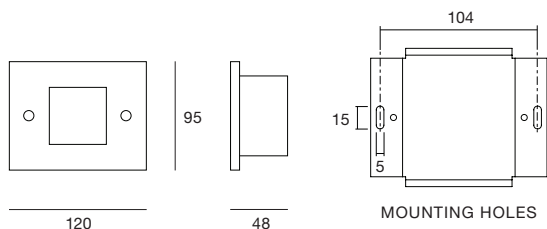


MOUNTING HOLES

WIRING DIAGRAM:

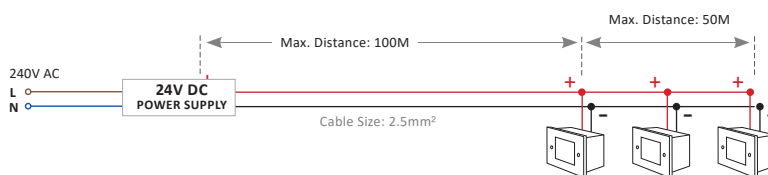

WIRING DIAGRAM FOR DALI OR 1-10V DIMMING:

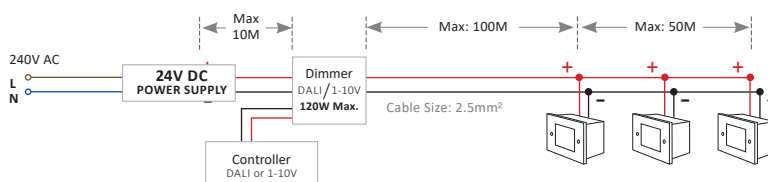

WIRING DIAGRAM FOR SWITCH DIM:

