


50 CURVED - H5075C

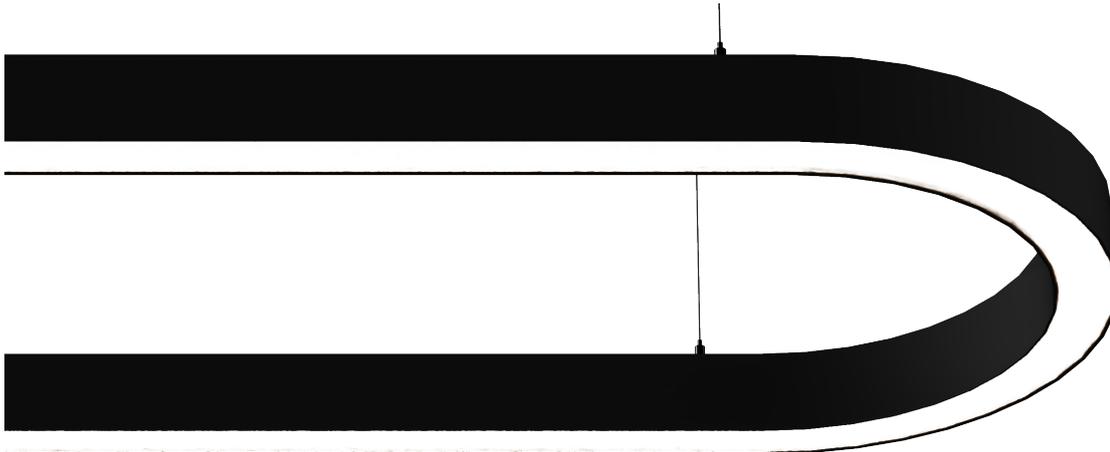


Key Features


- 300mm minimum bend radius
- Even illumination
- Complete with mounting components
- Complies with relevant Australian standards
- Detailed shop drawings
- Typical length is 2.5m (Longer lengths available on request)
- Other RAL colours available on request

Dimensions

Profile



Colour Options



Mounting

Surface Mounted (S) Wire Pendant (P) Up/Down Wire (U)
Rod Pendant (D) Up/Down Rod (Y)



Code

Example: H5075C - S1080300DDO10 - 2400

Code	Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length
H5075C	S Surface Mounted	10 9.6W/m 602lm/m	80 CRI>80 90 CRI>90	30 3000K 35 3500K 40 4000K 50 5000K RGB3 RGBW RGB4 RGBW 4000K	OD Opal	DO Non-Dim	10 Black 11 White CU Custom	- XXXX
	P Wire Pendant	28 28.8W/m 1806lm/m				DA DALI		
	D Rod Pendant	43 43.2W/m 2709lm/m				SW Switch-Dim		
	U Up/Down Wire					CA Casambi		
	Pendant					D4 DALI RGBW		
	Y Up/Down Rod					C4 Casambi		
Pendant		RGBW						