

1276
1277

Tommaso



IP54

CONSTRUCTION & DESIGN

- Surface mounted LED exterior wall light
- Constructed in pressure die cast aluminium alloy and finished in textured white, textured black and textured silver durable powdercoated paint
- High performance luminaire designed with LED technology providing optimal and uniform light output with low power consumption
- One way and two way light distribution for direct and indirect illumination with low glare
- Flush tempered glass cover, stainless steel exposed fasteners and silicone seals provide IP54 protection
- Ideal for general illumination and highlighting architectural features

TECHNICAL PERFORMANCE


- 22W or 2x15W total system power consumption with overload and short circuit protection
- >65,000 hours lifespan (L70)
- Premium quality Japanese LED Module with high lumen output per watt
- Chromaticity tolerance (MacAdam step) - 2
- Available in 3K, 4K, and 5K colour temperature with low colour shift over time

OPTICAL & THERMAL PERFORMANCE

- Customised heatsink provides premium optical and thermal performance
- Efficient optical control with no harsh cut off and ultra low glare

ELECTRICAL SYSTEM

- Supplied completely assembled with integral leading and trailing edge dimmable driver and terminal block
- Power factor > 0.9 with active power factor correction
- Input voltage 220-240V, 50/60 Hz

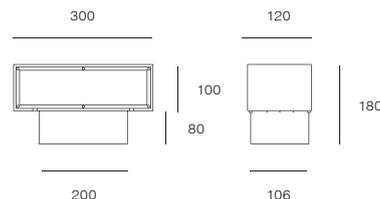

	ONE WAY		TWO WAY	Weight (kg)	3K and 4K CRI >85	5K CRI >75			IP54
--	---------	--	---------	-------------	----------------------	---------------	--	--	------

TOTAL SYSTEM POWER CONSUMPTION = 22W / 2x15W

CODE ORDERING GUIDE: Product Code / dimming suffix (if required) – Colour SUFFIX

Example: 1276-3K-03 or 1276-3K/DALI-03

WATTAGE	COLOUR TEMPERATURE	>55° WIDE	LIGHT SOURCE	HOT LED LUMENS
		PRODUCT CODES		
22W	3K	1276-3K	ONE WAY	2414
	4K	1276-4K	ONE WAY	2584
	5K	1276-5K	ONE WAY	2618
2x15W	3K	1277-3K	TWO WAY	3312
	4K	1277-4K	TWO WAY	3480
	5K	1277-5K	TWO WAY	3552

DIMMING OPTIONS: ADD SUFFIX AFTER THE CODE

		22W	2x15W
/DALI	Dali Dimming	✓	✓
/DSI	DSI Dimming	✓	✓
	Switch Dim	✓	✓
/AD	Analogue Dimming 1-10V	✓	✓
	Leading & Trailing edge mains dimming	STANDARD	STANDARD

FOR TRIM COLOUR. ADD SUFFIX AFTER THE CODE

- 03 Textured White
- 07 Textured Black
- 11 Textured Silver