


35 CURVED RECESSED - H3535RC

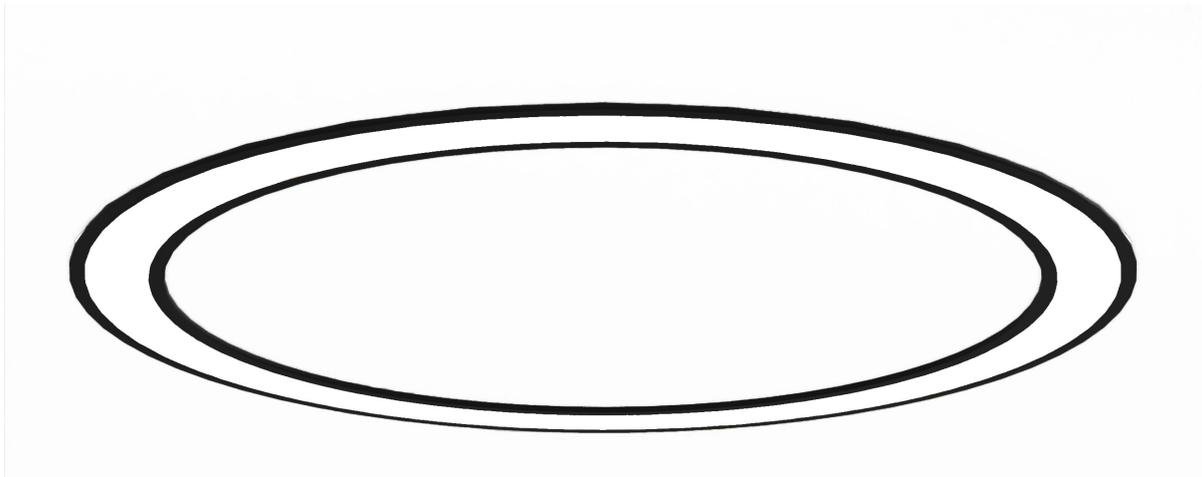


Key Features


- 300mm minimum bend radius
- Even illumination
- Complete with mounting components
- Complies with relevant Australian standards
- Detailed shop drawings
- Typical length is 2.5m (Longer lengths available on request)
- Other RAL colours available on request

Dimensions

Profile




Colour Options



Mounting

Recessed (R)



Code

Example: H3535RC - R108030ODD010 - 2400

Code	Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length							
H3535RC	R Recessed	5	4.8W/m	270lm/m	80	CRI>80	30	3000K	OD	Opal	DO	Non-Dim	10	Black	- XXXX
		10	9.6W/m	539lm/m	90	CRI>90	35	3500K			DA	DALI	11	White	
		15	14.4W/m	808lm/m			40	4000K			SW	Switch-Dim	CU	Custom	
		28	28.8W/m	1616lm/m			50	5000K			CA	Casambi			
							RGB3	RGBW			D4	DALI RGBW			
							RGB4	RGBW			C4	Casambi			
								4000K				RGBW			