


PHVB1617F



Key Features

- Minimum bend diameter - 300mm
- Ambient working temperature: (-)40°C to (+)55°C
- Bending Direction - Vertical
- Cut Length (Monochrome) - 55.6mm
- Cut Length (Tunable white) - 83.3mm
- Cut Length (RGB / RGBW) - 83.3mm


Connectors



Mounting Accessories



Accessory Dimensions

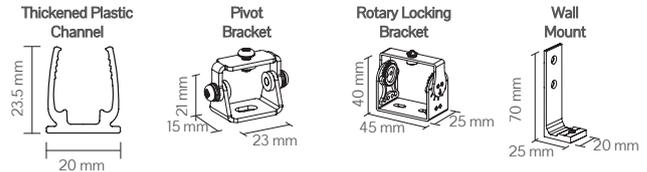

Code

Example: PHVB1617F - 128022DEDO - 2400

Code	Wattage (W/m)		CRI		CCT			Connector		Driver		Length	
	12	12 W/m	80	90			lm/m						
PHVB1617F	12	12 W/m	80	90	CRI>80	22	2200K	850	DE	Direct Entry	DO	Non-Dim	-xxxx
									SL	Left side entry	DA	DALI	
									SR	Right side entry	CA	Casambi	
									BE	Bottom Entry	SW	Switch Dim	
											PH	Phase Dim	
											RC	2.4Ghz Remote Control	

Lumen/m figures based on, 12W, CRI>80.

HAWKO Lighting reserve the right to change any data without notification.

CRI>90 only in 12W/m in 2700K, 3000K, 3500K, 4000K