

# H7597R




## Key Features


- Minimum length 600mm
- Maximum module length 4m
- 45°, 90°, T, X, Y bends available
- IP55 (On request)
- 3.3kg/m
- Custom colours available on request
- L80 B10 >100K Hours Lifetime

## Dimensions

### Profile




## Colour Options

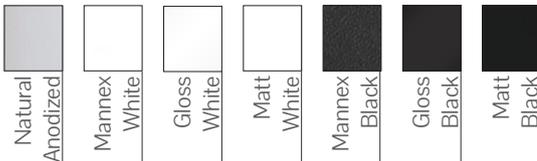

## Mounting

Recessed (R)



## Code

Example: **H7597R - R168030ODDO11 - 2400**

Code	Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length
H7597R	R Recessed	16 16W/m 1353lm/m	80 CRI>80	30 3000K	OD Opal	DO Non-Dim DA DALI PD Push-Dim CA Casambi TW Tunable White	79 Anodised	- XXXX
		19 19 W/m 1769lm/m	90 CRI>90	40 4000K			11 Mannex	
		26 26 W/m 2289lm/m		50 5000K			White	
		35 35 W/m 3017lm/m		2700K - 6500K			12 Gloss White	
							13 Matt White	
							10 Mannex Black	
							9 Gloss Black	
							8 Matt Black	
							CU Custom	

# FOS Lighting reserve the right to change any data without notification

\*\*Lumens based on 4000K

\*\*\*CRI 80 as standard