



















































LEGEND

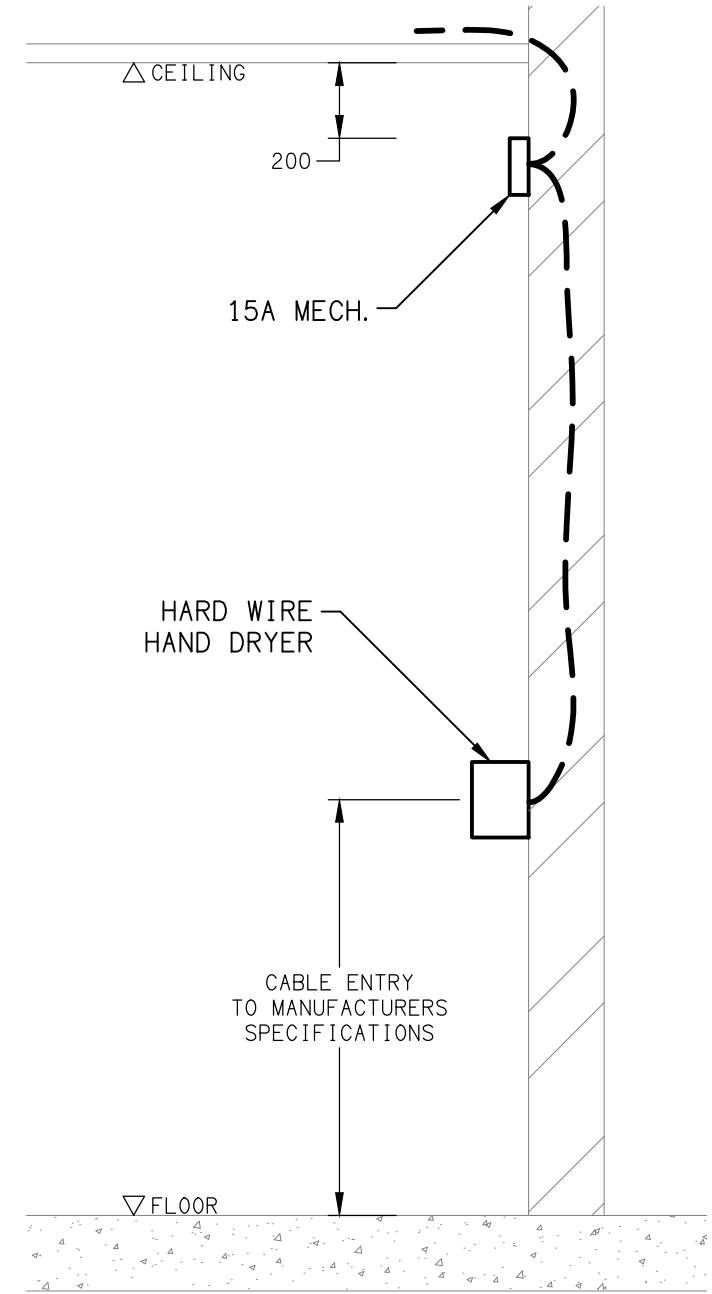
-  ELECTRICAL SERVICES SWITCHBOARD.
-  SWITCHBOARD / CONTROL PANEL NOT PROVIDED AS PART OF THE ELECTRICAL SUBCONTRACT.
-  SINGLE POWER OUTLET.
-  DOUBLE POWER OUTLET.
-  SPECIAL PURPOSE POWER OUTLET.
-  SIGNAGE OUTLET / CONNECTION.
-  SINGLE PHASE ISOLATOR.
-  THREE PHASE ISOLATOR.
-  HAND DRYER CONNECTION.
-  ELECTRICAL OUTLET BOLLARD.
-  ELECTRICAL RISER DUCT, TYPE AS NOTED.
-  ELECTRICAL SERVICES PIT, TYPE AS NOTED.
-  UNDERGROUND CONDUIT, TYPE AS NOTED.
-  ONE-WAY LIGHT SWITCH.
-  TWO-WAY LIGHT SWITCH.
-  LIGHTING CONTROL SWITCH PANEL, TYPE AS NOTED.
-  CIRCUIT LINE.
-  SWITCH LINE.
-  POWER CIRCUIT DESIGNATION. DENOTES DB AND CIRCUIT.
-  LIGHTING CONTROL CHANNEL REFERENCE.
-  ELECTRICAL EQUIPMENT AS NOTED.
-  600 x 600 ACCESS PANEL BY BUILDER.
-  CAT 6 RJ45 UTP COMMUNICATIONS OUTLET.
-  REFER TO DETAIL NOTED FOR THE AREA SHOWN HATCHED. ADDITIONAL OUTLETS & FITTINGS MAY BE SHOWN ON DETAIL.
-  MANUAL POT DIMMER / SWITCH.
-  MANUAL FAN SPEED CONTROL / SWITCH.
-  MANUAL 2-HOUR PUSH BUTTON RUN-ON TIMER.
-  PHOTO ELECTRIC DAY LIGHT SWITCH.
-  24-HOUR, 7-DAY TIME CLOCK SWITCH.
-  LIGHTING CONTACTOR.
-  E1: RECESSED NON-MAINTAINED EMERGENCY LIGHT.
-  EX: GENERAL EMERGENCY LED EXIT LIGHT.
-  GL01: GARDEN STAKE LIGHT.
-  L1: 1200 LONG SURFACE MOUNTED IP65 BATTEN C/W SENSOR.
-  L2: ADJUSTABLE IP65 FLOOD LIGHT MOUNTED ON HIGH LEVEL POST.
-  L3: EXISTING POLE MOUNTED LIGHT.
-  L4: ADJUSTABLE IP65 TREE CANOPY POLE LIGHT.
-  L5: ADJUSTABLE IP65 FLOOD LIGHT MOUNTED ON HIGH LEVEL POST.
-  L6: SUSPENDED FESTOON LAMP SYSTEM C/W COPPER SHADE.

LEGEND

-  L7: SUSPENDED FESTOON LAMP SYSTEM.
-  L8: BAR COUNTER LED STRIP LIGHT.
-  L9: BAR CENTRAL ISLAND LED STRIP LIGHT.
-  L10: AMENITY DOWNLIGHT.
-  L11: RECESSED DOWNLIGHT.
-  L12: RECESSED ADJUSTABLE DOWNLIGHT.
-  L13: MIRROR LED STRIP LIGHT.
-  L14: TV SURROUND LED STRIP LIGHT.
-  L15: TRUCK LIGHT.
-  POLE x: LIGHTING POLE, TYPE AS NOTED.
-  CF: CEILING FAN, WHITE.

ABBREVIATIONS

- A - AMP CURRENT RATING
- AB - MOUNT ABOVE BENCH.
- AFFL - ABOVE FINISHED FLOOR LEVEL.
- BB - MOUNT BELOW BENCH.
- CEIL - MOUNT ON CEILING.
- C/W - COMPLETE WITH.
- HWS - HOT WATER SYSTEM.
- MCB - MINITURE CIRCUIT BREAKER.
- MCCB - MOLDED CASE CIRCUIT BREAKER.
- MSB - MAIN SWITCHBOARD.
- N - NEON / LED INDICATOR WHEN ON.
- NBN - NATIONAL BROADBAND NETWORK.
- NTS - NOT TO SCALE.
- QDC - QUEENSLAND DEVELOPMENT CODE.
- RCBO - CIRCUIT BREAKER C/W AN INTEGRAL 30mA RESIDUAL CURRENT DEVICE.
- RCD - CIRCUIT PROTECTED VIA A 30mA RESIDUAL CURRENT DEVICE.
- RSD - ROLLER SHUTTER DOOR.
- UNO - UNLESS NOTED OTHERWISE.
- WAP - WIRELESS ACCESS POINT.
- WP - WEATHERPROOF TO IP56 UNO.
- 500 - NUMBER DENOTES MOUNTING HEIGHT AFFL.



DETAIL
HAND DRYER CONNECTION
NOT TO SCALE

