

NOX V4

Floodlight Range

Product information

The NOX range 15-50W floodlight is our latest development of the iconic LED Floodlight range. Featuring a plug option & ultra efficient offset bracket that installers demand. Super slim body and illumination specifications that lead in the floodlight category. Supported by a 7 year product warranty and with a 3 Year OSW from Sparkys United, NOX V4 is the brighter choice by far. Available in Warm White and White Models with plug.



IP65




IK10




WARRANTY



3 YEAR OSW

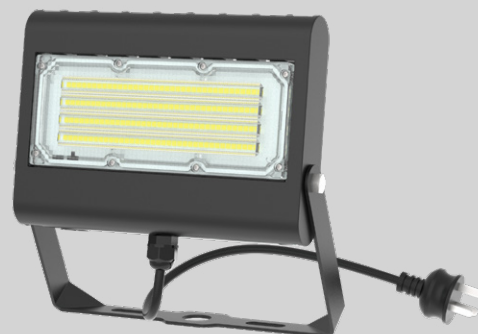

OUR 1-5 RANGE Available in Warm White and White Models with plugs

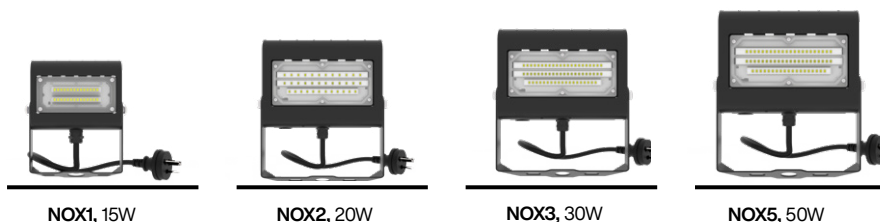

TECHNICAL INFORMATION

	ML-NOX1-V4-WW ML-NOX1-V4-W	ML-NOX2-V4-WW ML-NOX2-V4-W	ML-NOX3-V4-WW ML-NOX3-V4-W	ML-NOX5-V4-WW ML-NOX5-V4-W
Total Power	15W*	20W*	30W*	50W*
Lumen Output	WW 1823lm** W 1910lm**	WW 2571lm** W 2644lm**	WW 4102lm** W 4110lm**	WW 6400lm** W 6484lm**
Colour Temperature	WW 3000K W 5700K			
IP Rating	IP65			
Impact Rating	IK10			
Efficacy	WW 122lm/W W 127lm/W	WW 121lm/W W 124lm/W	WW 136lm/W W 137lm/W	WW 131lm/W W 133lm/W
CRI	≥70			
Frequency	50 / 60Hz			
Beam Angle	90° × 120°			
Temperature Range	-20°C to +40°C			
Dimmable	No			Yes (1-10V min 30%)
Power Supply	100-277V AC Towin Driver			100-277V AC Towin Dimmable Driver
Gland Size	No Gland	Ø 20.6 x 9.8mm		
Average Life	50,000hrs***			
Operating Current	0.0625A	0.08A	0.37A	0.208A
Inrush Current	Up to 7 times operating current			
Power Factor	>0.9			
Dimensions	W 128mm x H 148mm x D 45mm	W 216mm x H 190mm x D 50mm	W 190mm x H 216mm x D 50mm	W 238mm x H 247mm x D 52mm
Weight	0.58kg	1.15kg	1.16kg	1.627kg
Construction	ADC12 Aluminium heat sink with AkzoNobel powder coating & PC lens			
Kit Includes	1x LED floodlight, 1x 1m flex + plug, 1x User Manual			

*Total power consumed including driver

** Lumen output may vary upon installation environment

*** Average life is calculated on expected average lifespan