

BEGA**44 668**

Ceiling · Wall · Pillar luminaire



Project · Reference number

Date

Product data sheet

Application

Unshielded luminaire for installation under ceilings, on walls as well as on pillars and murals. By means of the three-ply opal glass the light is distributed softly and uniformly over the glass surface.

Product description

Luminaire made of aluminium alloy,
aluminium and stainless steel
BEGA Unidure® coating technology
Opal glass with screw neck
2 mounting holes $\varnothing$ 4.8 mm
Distance apart 50 mm
2 cable entries for through-wiring of mains
supply cable $\varnothing$ 7-10.5 mm
Connection terminal 2.5²
Earth conductor connection
Lampholder E 27
Safety class I
Protection class IP 65
Dust-tight and protection against water jets
Impact strength IK06
Protection against mechanical
impacts < 1 joule
 – Safety mark
CE – Conformity mark
Weight: 2.0 kg

Lamp

Luminaire with screw base E 27
Lamp output max. 75 W
This product contains light source of energy
efficiency class E

Supplied lamp

BEGA LED lamp **13588**

LED Retrofit 6.5 W · 1055 lm · 3000 K

Luminaire efficiency: 86%

Additional BEGA LED lamps are available for
this luminaire:

13584 LED 4,8 W · 805 lm · 3000 K

13586 LED 4.8 W · 805 lm · 3000 K
dimmable

13590 LED 9 W · 1520 lm · 3000 K

13592 LED 9 W · 1520 lm · 3000 K
dimmable



Radio-controlled version (Zigbee 3.0):

13555 LED 9 W · 805 lm · 2700 K
dimmable

13556 LED 9 W · 805 lm · 2700-6500 K
dimmable · tunable white

13557 LED 9.5 W · 805 lm · 2700-6500 K
dimmable · tunable white · RGBW

Detailed technical and lighting data for the
lamps can be found in the data sheets on our
website.

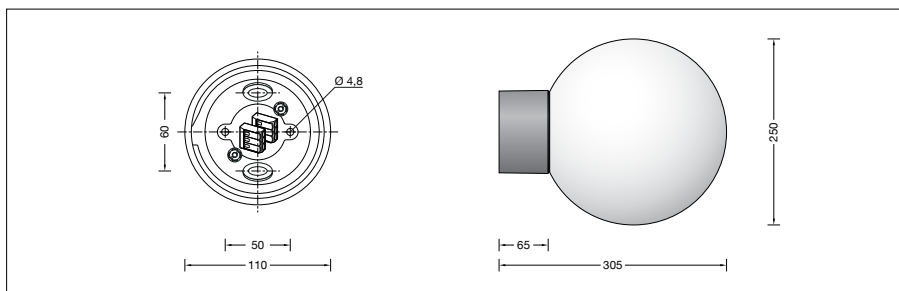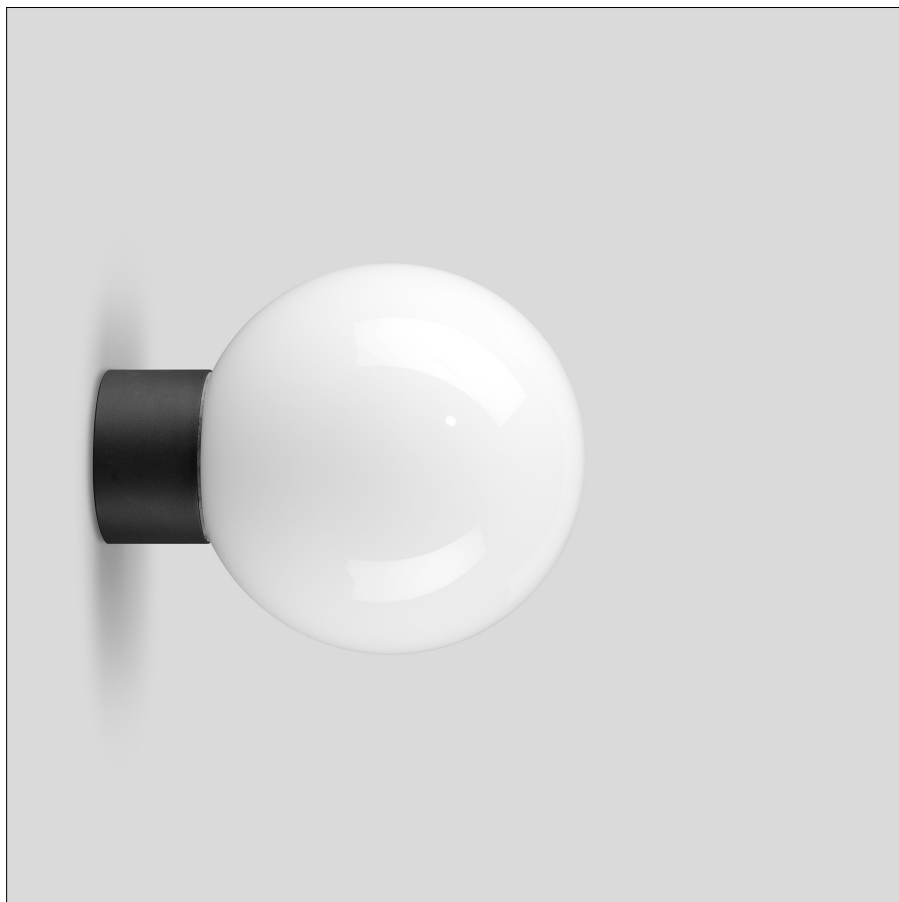

Lighting technology

Luminaire data for the DIALux lighting design
program for outdoor lighting, street lighting
and indoor lighting, as well as luminaire data in
EULUMDAT and IES format are available on the
BEGA website at www.bega.com.

Article No. 44 668

Colour graphite or bronze
graphite – article number
bronze – article number + **B**