




ZEUS-24


24W LED COMMERCIAL BOLLARD

R6331


- 500mm / 900mm
- 70 - 80Lm / W
- 3000k / 4000k



R03201



R03202



R03203





Round House Side Shield



Terminal Box

Mounting kit with anchor bolts

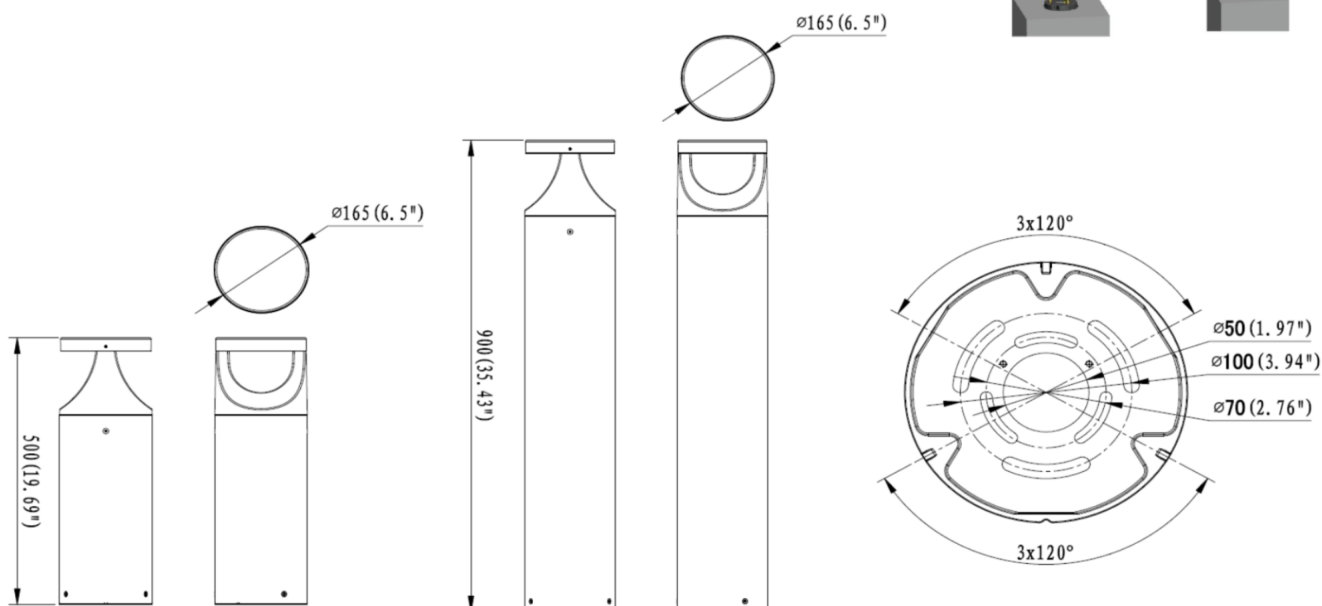

PRODUCT SPECIFICATIONS

Wattage	24W
Colour Temperature	3000K - WW, 4000K - CW
Lumen Output	1,680 - 1,920Lm
Lumen Output / W	70 - 80Lm / W
CRI	>80
Beam Angle°	See Attached Photometric Data
Fixture Colour	Black
IP Rating	IP66
IK Rating	IK10
Dimmable	Yes
LED Type	3030 SMD LED
Power Supply	Integral Class 1 Driver
Power Factor	>0.95
Lifetime Expectancy	L90 - 37,843Hrs L80 - 78,516Hrs L70 - 124,627Hrs
Voltage	100 - 240V AC

Frequency	50 - 60Hz
Working Temperature	-30°C~+ 50°C
Surge Protection	2kV line-line, 4kV line-earth / 1kV line-line, 2kV line-earth
Intelligent Control	DALI, 1-10V Dimming Optional
Product Dimensions	165mm Ø x 500mm (H), 165mm Ø x 900mm (H)
Product Materials	Housing : Powder Coated Aluminium Alloy Extruded Aluminium Pole Optics : Polycarbonate Optical Lens
Net Weight	500mm : 5.6±0.3kg 900mm : 7.56±0.3kg
Mounting Options	Mounting Kit w/ Anchor Bolts
Fitting Protection Classification	Class I
Accessories	R6332 Visor available as an accessory for back-light control
Warranty	5 Years (2 Year Replacement & Labour / 3 Year Replacement Only)