

1461

BOLO

1462



SPECIFICATIONS:



3.5 kg



CRI 82+

3K and 4K



CRI 70+

5K



Class I



IP65



CE



5

Year warranty



Made in Australia

CONSTRUCTION & DESIGN

- LED exterior post bollard
- Constructed from extruded and die cast aluminium alloy and finished in durable powdercoat paint
- Louvered optics to minimise visual glare and provide 360° light distribution with a 60° forward throw and 35° beam angle
- Silicone seals and stainless steel fasteners providing IP65 protection
- Optional ragbolt assembly for setting into cement
- The floor base mounting plate in this bollard is designed for installing on concrete paths or pads broadwalks
- The fasteners to secure to the floor are not supplied
- The use of the accessory ragbolt assembly for setting into concrete is recommended (to be ordered separately)
- Once installed the base and tube is to be kept clear and not buried by any garden material or soil.

OPTICAL & THERMAL PERFORMANCE

- Louvered optics and integrated heatsink provides premium optical and thermal performance with low glare

ELECTRICAL SYSTEM

- Supplied standard with an integral leading and trailing edge mains dimmable driver and terminal block
- Power factor > 0.9 with active power factor correction
- Input voltage 220-240V, 50/60 Hz

TECHNICAL PERFORMANCE

- 13W, 22W or 28W total system power consumption with overload and short circuit protection
- >65,000 hours lifespan (L70)
- Premium quality LED Module with high lumen output per watt
- Available in 3K, 4K or 5K colour temperature with low colour shift over time

CODE ORDERING GUIDE:

PRODUCT CODE

/

DIM CODE

-

COLOUR CODE

Example: 1461-3K-13W-07 or 1461-3K-13W/DALI-07

SYSTEM POWER	COLOUR TEMP.	PRODUCT CODE	HOT LED LUMENS	LUMINAIRE LUMEN OUTPUT
13W	3K	1461-3K-13W	1519	160
	4K	1461-4K-13W	1607	168
	5K	1461-5K-13W	1568	165
22W	3K	1461-3K-22W	2414	247
	4K	1461-4K-22W	2584	259
	5K	1461-5K-22W	2520	254
28W	3K	1462-3K-28W	3213	330
	4K	1462-4K-28W	3380	348
	5K	1462-5K-28W	3310	339



DIM CODE		13W	22W	28W
/DALI	Dali Dimming / Switch Dim	✓	✓	✓
/DSI	Digital Dimming	✓	✓	✓
/AD	Analogue Dimming 1-10V	✓	✓	✓
/DIM	Leading & Trailing edge	Std	Std	Std

COLOUR CODE

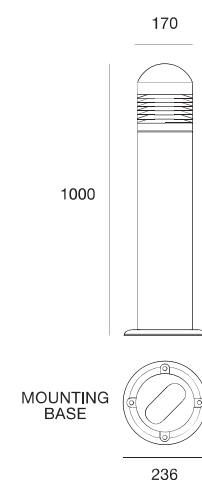
-07		Textured Black
-11		Textured Silver

ACCESSORY CODE

794

Ragbolt assembly for setting into cement
(need to be ordered separately)

250



MOUNTING BASE

MOUNTING BASE

