




RAPTOR-MED


QUAD WATTAGE ANTI-CORROSION LED COMMERCIAL STREET LIGHT - IP66

R3240-MED


- Wattage Selectable (70W / 52W / 35W / 21W)
- Dual Colour (3000K / 4000K)
- 115Lm / W
- Electrophoresis with Strong Anti-Corrosion Resistance




R09601




R09602




R09603



R09604



R09605



R09614



Side entry mounting




Post top mounting





Wall mounting



Corner mounting

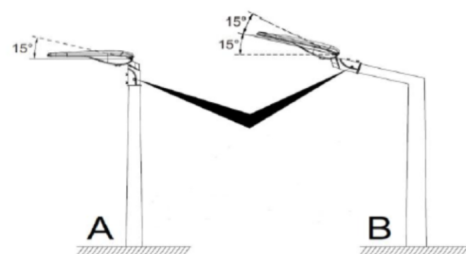

±15° tilt adjustable

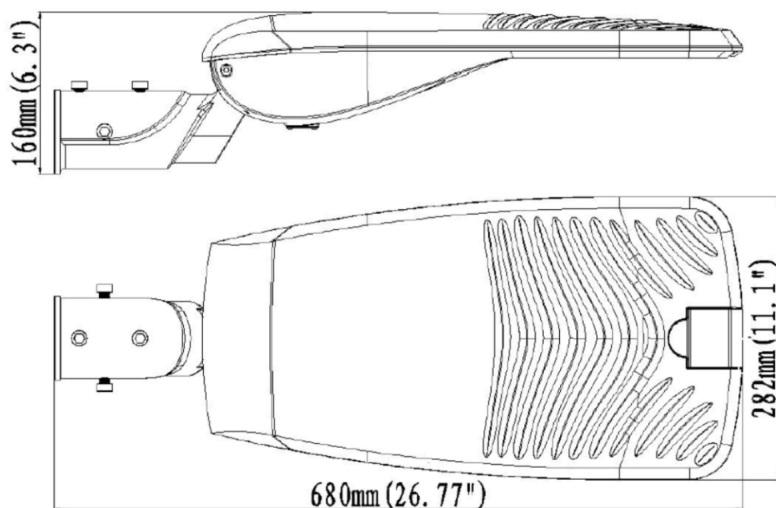

PRODUCT SPECIFICATIONS

Wattage	Quad Wattage Selectable (70W / 52W / 35W / 21W)
Colour Temperature	DUAL (3000K / 4000K)
Lumen Output	21W - 30% : 2,400Lm 35W - 50% : 4,000Lm 52W - 75% : 6,000Lm 70W - 100% : 8,000Lm
Lumen Output / W	115Lm / W
CRI	>80
Beam Angle	See Photometry (R09601 - Standard, R09602, R09603, R09604, R09605, R09614)
Dimmable	No
Fixture Colour	Black
IP Rating	IP66
IK Rating	IK08
LED Type	3030 SMD
Lifetime Expectancy	>200,000Hrs
SDCM	<5
Power Supply	Sosen - Constant Current
Power Factor	>0.95
Voltage	220 - 240V AC
Frequency	50 - 60Hz
Working Temperature	-30°C~+ 50°C
Surge Protection	6kV line-line, 12kV line-earth

Sea Salt Spray Test	1000Hrs
Photobiosafety Test	IEC / EN62471 Safety of Lamps and Lamp Systems
3G Vibration Test	ANSI C136.31 Earthquake and Vibration Resistant
Fitting Protection Classification	Class I
Spigot Size	60mm, 76mm
Product Dimensions	680mm (L) × 282mm (D) × 160mm (H)
Product Materials	Housing: Coastal Coated Aluminium Alloy Optics: Tempered Glass & Polycarbonate Lens
Mounting Options	Included - 60mm / 76mm Spigot (Adjustable Angle)
NEMA Socket Compatibility	3 Pin 5 Pin 7 Pin
Intelligent Control	Optional Dali Control
Accessory Options	Wall Mount Bracket NEMA Socket : 3 Pin / 5 Pin / 7 Pin Photocell Shorting Cap
Warranty	5 Years (2 Years Replacement & Labour / 3 Years Replacement Only)
Standards	AS/NZS 60598.1 AS/NZS 60598.2.3 AS CISPR 15