

LIFELIGHT PRO RECESSED EMERGENCY



Premium LED Emergency Light

The Lifelight Pro is an energy efficient, lithium powered LED emergency light in a small and sleek architectural design. The D80 classification of the Lifelight Pro provides an amazing 60% increase in emergency lighting coverage compared to many existing emergency lights on the market.

Suitable in a variety of applications the Lifelight Pro will provide outstanding performance and will reduce installation and maintenance costs.

Applications



Office Buildings



Showrooms



Galleries



Retail outlets



Apartments



Theatres

LP LITHIUM IRON
PHOSPHATE
PREMIUM
PREMIUM PROJECT PERFORMANCE

L10 LITHIUM
NANOPHOSPHATE®
OPTIMUM
NOTHING ELSE COMPETES WITH NANOPHOSPHATE®

Features and Benefits

- AS/NZS 2293.3 compliant
- D80 emergency classification
- 95mm adaptor plate for retrofitting
- Low 0.4W power consumption
- Spring clips for easy installation
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- White or black (other colours on request)
- Round or square head



LIFELIGHT PRO RECESSED EMERGENCY

ORDERING INFORMATION		LP		L10	
TEST OPTIONS / PART #	Standard - White	CLIFE-PRO	CLIFE-PRO-SQ	LLIFE-PRO	LLIFE-PRO-SQ
	Standard - Black	CLIFE-PRO-BLK	CLIFE-PRO-SQ-BLK	LLIFE-PRO-BLK	LLIFE-PRO-SQ-BLK
	Clevertest Plus System Compatible	Yes			
	DALI	CLIFE-PRO-DALI	CLIFE-PRO-SQ-DALI	LLIFE-PRO-DALI	LLIFE-PRO-SQ-DALI
	Zoneworks® XT Hive	CLIFE-PRO-HV	CLIFE-PRO-SQ-HV	LLIFE-PRO-HV	LLIFE-PRO-SQ-HV
Carton Quantity		10 Pieces			
Weight - Single (Carton)		0.8kg (9.7kg)			
Dimensions (L x W x H) - Control Pack		232mm x 40mm x 40mm			
Dimensions - Head Diameter		60mm			
Dimensions - Adaptor Plate		95mm	-	95mm	-
Ceiling Hole Cut-Out		51mm			
Minimum Ceiling Depth		200mm			

POWER, LAMPS AND BATTERY		LP	L10
Power Consumption (Standby / Max)		0.4W / 2.7W	
Lamp(s)		2 x LED	
Battery		Lithium Iron Phosphate	Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)		3.2V / 6400mAh	3.3V / 5000mAh
Charging Method		Intelligent Current Limited Constant Voltage	

TECHNICAL SPECIFICATIONS		CLASSIFICATION		LP	L10
Operating Mode		Non-Maintained		D80	D80
Voltage (V) Frequency (Hz)		220-240V (50Hz)		D80	D80
Operating Temperature		1°C to 40°C		D80	D80
IP Rating (IP)		IP20			

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1


■ Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>


*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

Product Configuration:

- 1 Round head
- 2 Square head

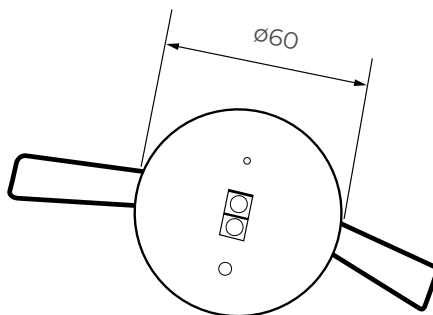

Dimensions (mm)



Ceiling hole cut-out = 51mm

clevertronics.co.nz
clevertronics.com.au

1 Caribbean Drive, Scoresby VIC 3179
 P +61 3 9559 2700 F +61 3 9559 2799 E info@clevertronics.com.au

Clevertronics is committed to continuously improving its products.
 All features and specifications are subject to change without prior notice.
 _PRODUCT SHEETS – ANZ Lifelight Pro Recessed 04OCT22

