


GAP57575

GAP57575



SPECIFICATIONS:

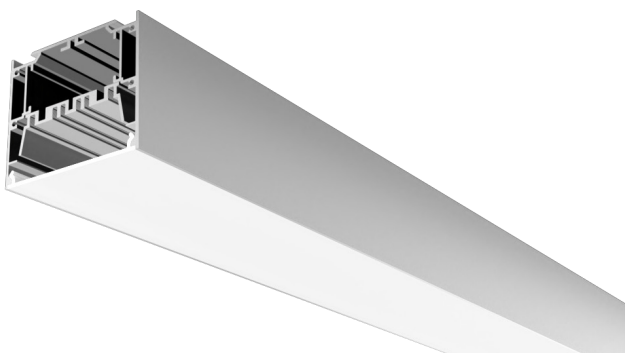

IP20



CONSTRUCTION & DESIGN

- Suspended or surface mount linear extrusion profile
- High quality opal matte UV resistant diffuser
- Supplied as standard in 1m length. Also optional customised length (cutting increments of 50mm)
- For indoor use only

ELECTRICAL SYSTEM

- Supplied with input cable
- Supplied completely assembled with integral driver
- Input voltage 220-240V, 50/60H

TECHNICAL PERFORMANCE

- 14W, 16W, 19W, 22W, 25W, 28W, 31W, 35W, 38W, and 41W LED power consumption per metre
- >75,000 hours lifespan (L70)
- Chromaticity tolerance (MacAdam step)-2
- Available in 3K or 4K color temperature. Other colour temperatures or CRI available on request

CODE ORDERING GUIDE:

PRODUCT CODE


/ DIM CODE

- COLOUR CODE

Example: GAP57575-3K-14W-13 or GAP57575-3K-14W/DALI-99

SYSTEM POWER/METRE	COLOUR TEMP.	 >90° BEAM ANGLE	LUMINAIRE LUMEN OUTPUT/METRE
		PRODUCT CODE	
14W	3K	GAP57575-3K-14W	1378
	4K	GAP57575-4K-14W	1451
16W	3K	GAP57575-3K-16W	1634
	4K	GAP57575-4K-16W	1720
19W	3K	GAP57575-3K-19W	1898
	4K	GAP57575-4K-19W	1998
22W	3K	GAP57575-3K-22W	2148
	4K	GAP57575-4K-22W	2262
25W	3K	GAP57575-3K-25W	2424
	4K	GAP57575-4K-25W	2552
28W	3K	GAP57575-3K-28W	2696
	4K	GAP57575-4K-28W	2838
31W	3K	GAP57575-3K-31W	2945
	4K	GAP57575-4K-31W	3100
35W	3K	GAP57575-3K-35W	3169
	4K	GAP57575-4K-35W	3336
38W	3K	GAP57575-3K-38W	3396
	4K	GAP57575-4K-38W	3575
41W	3K	GAP57575-3K-41W	3649
	4K	GAP57575-4K-41W	3842


The total system power consumption depends on extrusion length option and driver used (Refer to total power consumption guide)

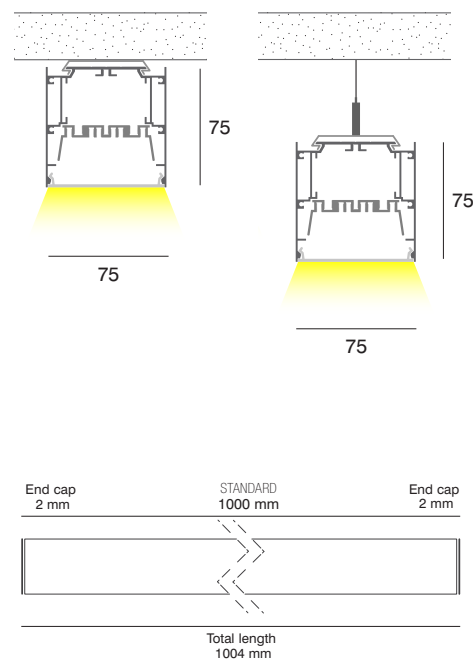


GAP57575

GAP57575


MOUNTING OPTIONS:

SURFACE MOUNT	SUSPENDED
INCLUDED	SUSKIT (add -2m / -5m for specific length)
Contains 2 mounting brackets per standard length	Contains 2 suspension cables per standard length (2m, 5m or other lengths available on request)
	


MINIMUM SINGLE LENGTH PROFILE: 400 mm / MAXIMUM SINGLE LENGTH PROFILE: 2500 mm

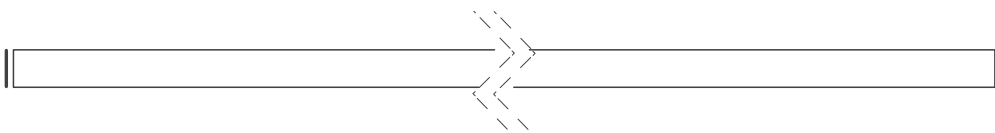

MAXIMUM CONTINUOUS LENGTH PROFILE: 50 m (cutting increments of 50 mm)

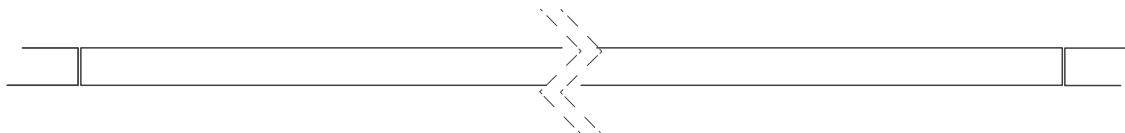

JOINING DIAGRAM

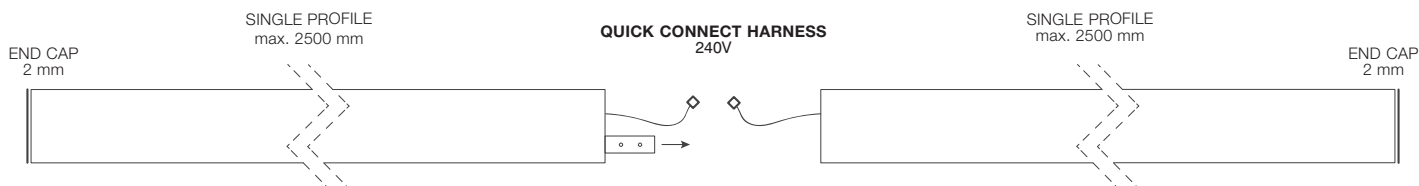

CODE ORDERING GUIDE: Contact sales for ordering guide			TOTAL POWER CONSUMPTION GUIDE		
DIMMING OPTION: ADD SUFFIX AFTER THE CODE			LED (W)/m	Approx. led driver efficiency	Approx. total power consumption (W)/m
/DALI	Dali Dimming	✓	14	88.0%	15.5
/DSI	Digital Dimming / Switch Dim	✓	16	88.0%	18.7
	Non-Dimmable	✓	19	88.0%	22.0
ACCESSORIES: CODE ORDERING GUIDE FOR SPECIFIC LENGTH			22	88.0%	25.4
Example: White-2m or Black-5m			25	90.0%	28.2
CAB-3	Input Cable 3 CORE (White, Black, Grey)		28	90.0%	31.5
CAB-5	Input Cable 5 CORE (Clear only)		31	90.0%	35.0
SUSKIT	Suspension Cable (2m, 5m or other lengths available on request)		35	90.0%	38.4
COLOUR CODE			38	91.0%	41.5
-03	 Texture White		41	91.0%	45.2
-07	 Texture Black				
-13	 Anodised Silver				
-99	Custom				