





HAWK-40

24W / 40W, 1200MM DUAL WATTAGE
WEATHERPROOF SENSOR BATTEN - IP65

R3540-S-TRI

- Tri Colour
- 120 - 130Lm / W
- Samsung LED's
- Step Dim Sensor with Daylight Priority
- Wide Body

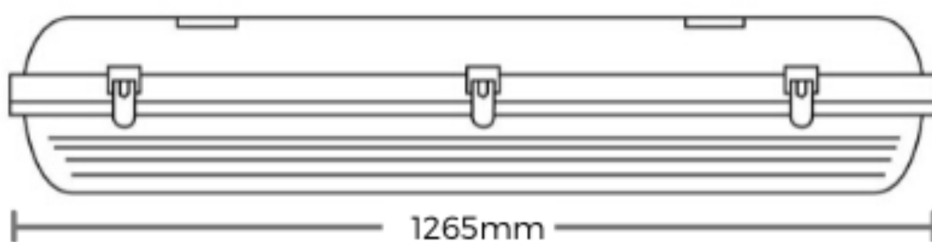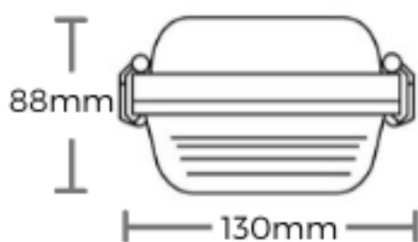



PRODUCT SPECIFICATIONS

Wattage	Dual Wattage Selectable (24W / 40W)
Colour Temperature	TRI (3000K / 4000K / 5700K)
Lumen Output	24W - 60% : 2,880Lm / 3,150Lm / 3,060Lm 40W - 100% : 4,800Lm / 5,250Lm / 5,100Lm
Lumen Output / W	120 - 130Lm / W
CRI	>80
Beam Angle°	110°
Fixture Colour	Grey - Opal Diffuser
IP Rating	IP65
IK Rating	IK08
Dimmable	3-Step Dimmable Corridor Function Sensor
LED Type	Samsung SMD 2835 LED Chips
SDCM	<3
LM80	L70 >54,000Hrs
Power Supply	Class I Flicker Free Merrytek Driver

Power Factor	>0.90
Voltage	220 - 240V AC
Frequency	50 - 60Hz
Working Temperature	-20°C ~+ 40°C
Product Dimensions	1265mm (L) x 130mm (W) x 88mm (H)
Product Materials	Housing - Polycarbonate Optics - Opal Diffuser Plastic grey clips
Fitting Protection Classification	Class I
Mounting Options	Suspension Mount Surface Mount
Optional Accessories	Stainless Steel Clips
Warranty	5 Year Warranty (2 Years Replacement & Labour / 3 Years Replacement Only)
Standards	AS/NZS 60598.1 AS/NZS 60598.2.1 AS/NZS 61347.1 AS/NZS 61347.2.13 AS CISPR 15