



RAPID
LED

TECHNICAL DATA SHEET




ATLANTA-150

LOW GLARE UGR<19 DEEP SET COB LED DOWNLIGHT

R1093-TRI

- 8w / 10w / 18w / 25w
- Tri Colour
- White / Black Trim
- 150mm Cutout

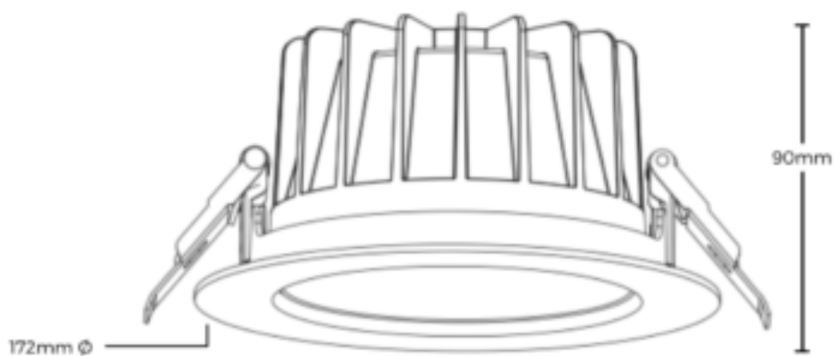

PRODUCT SPECIFICATIONS

Wattage	8W, 10W, 18W, 25W	Power Factor	0.9
Colour Temperature	TRI (3000K / 4000K / 5000K)	Voltage	220 - 240V AC
Lumen Output / W	82 - 100Lm / W	Frequency	50 - 60Hz
Lumen Output	8W : 650 - 740Lm 10W : 820 - 925Lm 18W : 1,700 - 1,850Lm 25W : 2,300 - 2,500Lm	Working Temperature	-20°C ~+ 45°C
CRI	>90	Cutout	150mm
Beam Angle°	60°	Product Dimensions	90mm (H) x 172mm Ø
Fixture Colour	Black, White	Product Materials	Housing : Aluminium Optics : Low Glare Reflector Silver Faceted Reflector as Standard
Reflector Colour	Black, Faceted Silver, Matte Silver, White	Fitting Protection Classification	Class II
Dimmable	Yes	Intelligent Control	DALI / DSI - Available upon request
IP Rating	IP54	Mounting Options	Recessed
IC4 Rated	No	Indent Only Options	Colour Temperature 2700k - WW Beam Angle° 24° 36°
IK Rating	IK06	Warranty	5 Years (2 Years Replacement & Labour / 3 Years Replacement Only)
LED Type	Bridgelux COB	Standards	AS/NZS 60598.1 AS/NZS 60598.2.2 AS/NZS 61347.1 AS/NZS 61347.2.13 AS CISPR 15
Lifetime Expectancy	L80/B10 >50,000Hrs		
SDCM	<3		
UGR	<19		
Power Supply	Remote Class II		