




OPTIMA-35

WATTAGE SELECTABLE LED DALI DIMMABLE TRACK SPOTLIGHT

R2582-DALI

- Suit 3 Circuit 6 Wire Track
- Wattage Selectable (35W - 25W)
- 3000k / 4000k

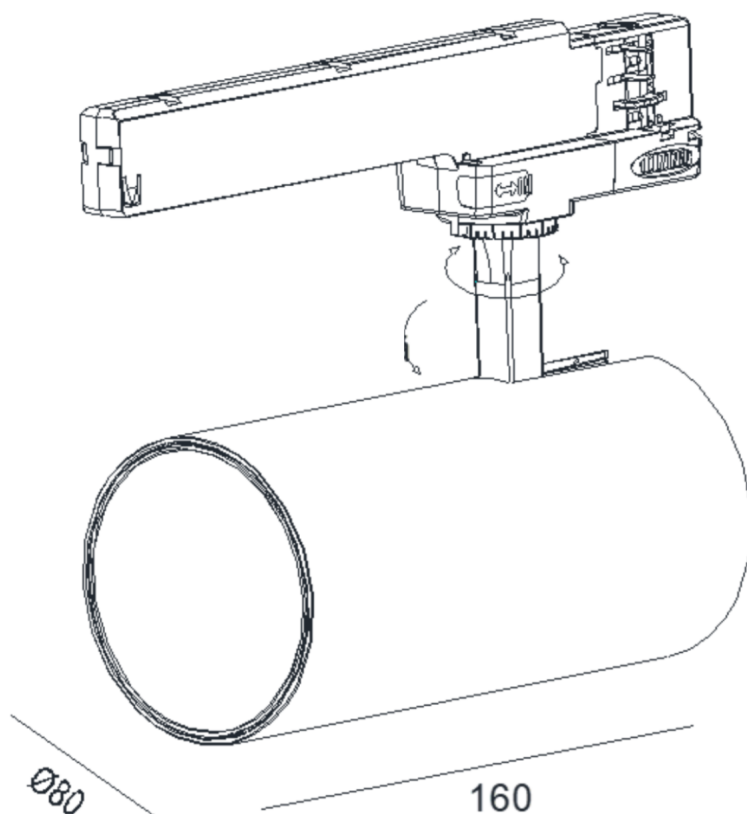

PRODUCT SPECIFICATIONS

Wattage	Tri Wattage Selectable (35W / 30W / 25W)
Colour Temperature	3000K - WW, 4000K - WW
Lumen Output	25W - 71%: 2,200Lm 30W - 85% : 2,640Lm 35W - 100% : 3,010Lm
Lumen Output / W	88Lm / W
CRI	>90
Beam Angle°	12°, 24°, 36°, 60°
Rotation°	Horizontal : 360° Vertical : 90°
Fixture Colour	Black, White
IP Rating	IP20
Dimmable	Yes
LED Type	LEDTEEN COB
SDCM	<3
Power Supply	Integral DALI 2 Driver
Power Factor	>0.9

Voltage	200 - 240V AC
Frequency	50 - 60Hz
Working Temperature	-10°C ~+ 35°C
Product Dimensions	160mm (H) x 80mm Ø
Product Materials	Housing : Aluminium Optics : PMMA Diffuser
Optics	Low Glare 30° Shielding Angle
Fitting Protection Classification	Class II
Product Compatibility	R2651 - Three Circuit 6 Wire Track (DALI Compatible)
Intelligent Control	DALI
Mounting	Track Mount
Warranty	5 Years (2 Years Replacement & Labour / 3 Years Replacement Only)
Standards	AS/NZS 60598.1 AS/NZS 60598.2.1 AS/NZS 61347.1 AS/NZS 61347.2.13 AS CISPR 15