

WPELLBE

Stanilite Platinum Exit IP65 Edgelit Picto Ceiling Mounted



Stanilite®



Component type	Emergency luminaire
Range	Single Point Platinum Exit Lighting
Model	N/A
Product status	New Item

The Stanilite single point Platinum exit lighting range features energy saving LED light source, efficient lithium power and fully retrofittable to previous generations of Quickfits.

ELECTRICAL

Operating mode	Maintained
Nominal voltage	240 V
Voltage type	AC
Max. system power	2.3 W
Viewing distance	24 m
Nominal operation time	50000 h
Driver type	LED

CONSTRUCTION

With remote switch connection	No
With remote control	No
Mounting method	Wall/ceiling/suspension
With pictogram	Yes
With light source	Yes
Material housing	Polycarbonate (PC)
Colour housing	White
Material cover	Acrylic
IP rating	IP65

PHOTOMETRIC

Lamp type	LED not exchangeable
Photometric classification (C0)	E2
Photometric classification	E1.25

DIMENSIONS

Width	60 mm
Height/depth	215 mm
Length	362 mm
Width of cutout	80 mm
Length of cutout	450 mm

ENVIRONMENT

Rated ambient temperature according to IEC62722-2-1	0...40 °C
---	-----------

CERTIFICATES/APPROVALS

Compliant to AS/NZS CISPR 15	Yes
------------------------------	-----

WPELLBE

Stanilite Platinum Exit IP65 Edgelit Picto Ceiling Mounted




Stanilite®

CERTIFICATES/APPROVALS

Compliant to AS/NZS 2293.3:2018	Yes
Compliant to AS/NZS 60598.1:2017	Yes
Compliant to AS/NZS 60598.2.22:2005	Yes

DIMENSIONAL DIAGRAM

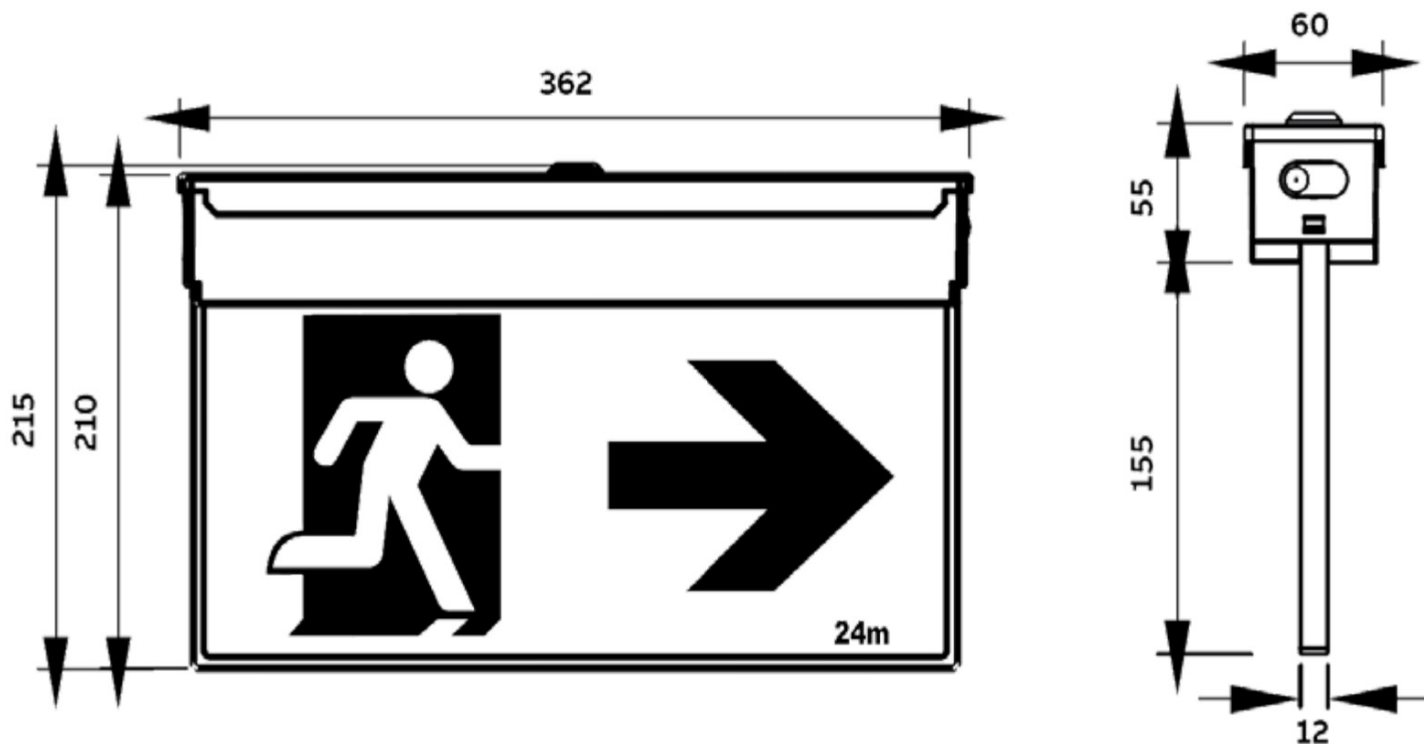

RELATED PRODUCTS

ACCESSORY



Item No: WPELBPW

Required: No

Description: Stanilite WP IP65 Edgelit Black Pendant Mounting Kit



Item No: WPELRECW

Required: No

Description: Stanilite IP65 Edgelit White Recess Mounting Kit



Item No: WPELCBW

Required: No

Description: Stanilite WP IP65 Edgelit White Cantilever Bracket



Item No: WPELSUS

Required: No

Description: Stanilite WP IP65 Edgelit Pendant Mounting Kit