

1340
1341
1342

Altus

UNIQUE SQUARE
DOUBLE BATWING
LIGHT OUTPUT

IP65

CONSTRUCTION & DESIGN

- LED exterior adjustable floodlight
- Constructed in pressure die cast aluminium alloy and finished in textured white, textured black and textured silver durable powdercoated paint
- High performance LED floodlight with excellent vertical illumination and ultra low glare output
- Secure tilt adjustable mechanism for reliable and accurate alignment
- Tempered glass cover, stainless steel exposed fasteners and silicone seals provide IP65 weather protection
- Sealed cable gland PG9 in stainless steel
- Ideal for carparks, tennis courts, general floodlighting, perimeter and security lighting

TECHNICAL PERFORMANCE

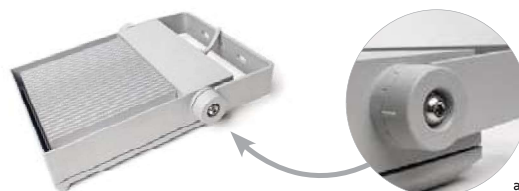
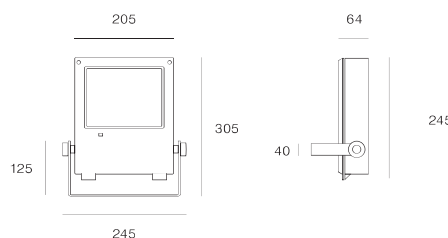
- 28W, 45W or 60W total system power consumption with overload and short circuit protection
- >150,000+ hours lifespan (L70)
- Premium quality Japanese LED Module with high lumen output per watt
- Chromaticity tolerance (macAdam step) - 2
- Available in 3K, 4K, and 5K colour temperature with low colour shift over time

OPTICAL & THERMAL PERFORMANCE

- Components are mounted on custom designed aluminium and die cast housing for optimal heat sinking
- LED thermal management system incorporates both conduction and natural convection to transfer heat rapidly away from LED source
- Efficient optical control with no harsh cut off and ultra low glare

ELECTRICAL SYSTEM

- Supplied completely assembled with integral non-dimmable driver and terminal block
- Power factor > 0.9 with active power factor correction
- Input voltage 220-240V, 50/60 Hz

Secure tilt adjustable
mechanism for reliable
and accurate alignment.

Weight (kg)	3K and 4K	5K							
3.3	CRI >85	CRI >75							

TOTAL SYSTEM POWER CONSUMPTION = 28W /45W /60W

CODE ORDERING GUIDE: PRODUCT CODE – COLOUR SUFFIX

Example: 1340-3K-03

WATTAGE	COLOUR TEMPERATURE	 >55° WIDE	HOT LED LUMENS
28W	3K	1340-3K	3643
	4K	1340-4K	3828
	5K	1340-5K	3907
45W	3K	1341-3K	5874
	4K	1341-4K	6171
	5K	1341-5K	6896
60W	3K	1342-3K	7605
	4K	1342-4K	8010
	5K	1342-5K	8213

SUPPLIED AS STANDARD WITH INTEGRAL NON-DIMMABLE DRIVER

COLOUR OPTIONS: ADD SUFFIX AFTER THE CODE

- 03  Textured White
- 07  Textured Black
- 11  Textured Silver