LEGEND

- ELECTRICAL SERVICES SWITCHBOARD.
- SWITCHBOARD / CONTROL PANEL NOT PROVIDED AS PART OF THE ELECTRICAL SUBCONTRACT.
- SINGLE POWER OUTLET.
- DOUBLE POWER OUTLET.
- GAMING / TAB OUTLET BY GAMING ELECTRICIAN.
- SIGNAGE CONNECTION.
- SINGLE PHASE ISOLATOR.
- THREE PHASE ISOLATOR.
- CONDUIT ROUTE.
- LIGHTING CONTROL SWITCHPANEL, TYPE x.
- CIRCUIT LINE.
- SWITCH LINE.

POWER CIRCUIT DESIGNATION. DB-x - Py DENOTES DB AND CIRCUIT.

- ELECTRICAL EQUIPMENT AS NOTED.
- REFER TO DETAIL NOTED FOR THE AREA SHOWN HATCHED. ADDITIONAL OUTLETS & FITTINGS MAY BE SHOWN ON DETAIL.

LIGHTING CONTROL CHANNEL REFERENCE.

- Sx: LED JOINERY / CEILING STRIP LIGHT, TYPE AS NOTED.
- E1: GENERAL RECESSED LED EMERGENCY LIGHT, WHITE.
- E2 € E2: GENERAL SURFACE LED EMERGENCY LIGHT, BLACK.
- EX: EMERGENCY LED EXIT LIGHT, WHITE UNLESS NOTED AS BLACK.
- PD01: DECORATIVE SUSPENDED PENDANT LIGHT.
- PD02 O PD02: DECORATIVE SUSPENDED PENDANT LIGHT.
- WL01Q WL01: DECORATIVE WALL LIGHT.
- WLO2: DECORATIVE WALL LIGHT.
- WLO3: DECORATIVE WALL LIGHT.
- WLO4: DECORATIVE WALL LIGHT.
- RD01: RECESSED DOWNLIGHT, WHITE.
- RD02: RECESSED DOWNLIGHT, BLACK.
- RECESSED ADJUSTABLE DOWNLIGHT, BLACK.
- RD04: RECESSED DOWNLIGHT, WHITE.
- RD05 O RD05: RECESSED ADJUSTABLE DOWNLIGHT, WHITE.
- RD06 🔿 RD06: RECESSED DOWNLIGHT, BLACK.
- RD07: RECESSED DOWNLIGHT, WHITE.
- RD08: RECESSED RECTANGULAR DOWNLIGHT, WHITE.
- RDE: EXISTING RECESSED DOWNLIGHT TO BE RECONNECTED.
- SLO1 O SLO1: SURFACE MOUNTED CAN DOWNLIGHT, WHITE.
- UL01: INGROUND UPLIGHT.
- FS01: FESTOON LIGHTING FIXED TO STAINLESS STEEL SUPPORT, BLACK. FS02
 - FS02: FESTOON LIGHTING FIXED TO STAINLESS STEEL SUPPORT, BLACK.
- FO1: WALL FAN, BLACK.


EQUIPMENT:

TEST - TEST PUSH BUTTON MOUNTED ON THE DISTRIBUTION BOARD ESCUTCHEON.

RESET - RESET PUSH BUTTON MOUNTED ON THE DISTRIBUTION BOARD ESCUTCHEON.

LAMP - AMBER TEST INDICATING LAMP MOUNTED ON THE DISTRIBUTION BOARD ESCUTCHEON.

- Ta ADJUSTABLE 0-3 HOUR TIMED RELAY.
- Tb 15 MINUTE RUN-ON TIMER TO OPERATE UPON THE RETURN OF MAINS POWER.
- Cx CONTACTOR x.
- CRx CONTROL RELAY x.
- Rx RELAY x.

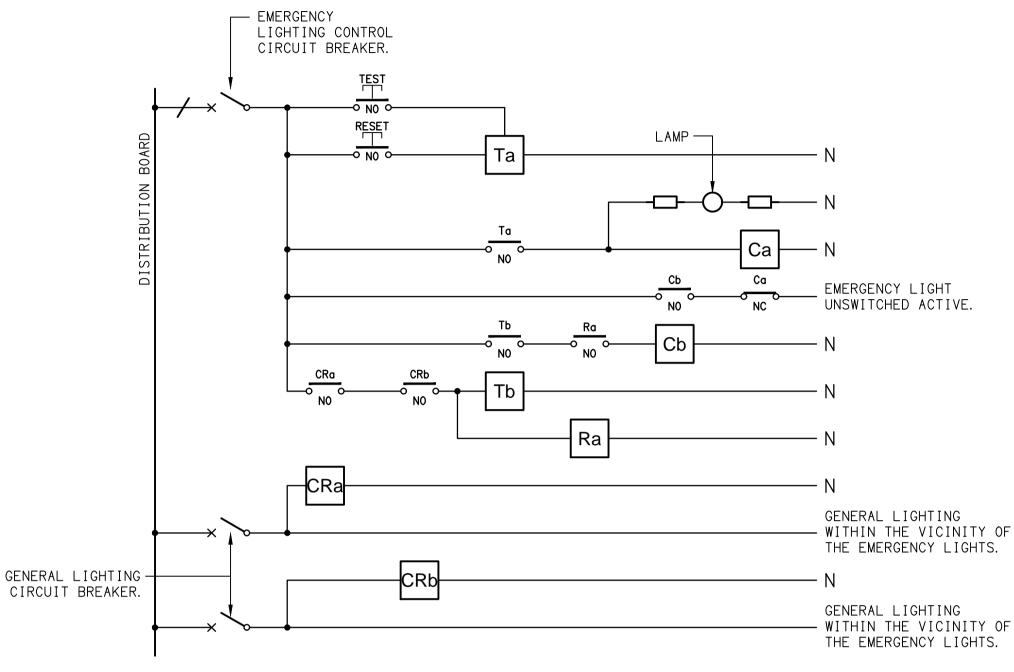


NOTES

SCHEMATIC

EMERGENCY LIGHTING NOT TO SCALE

1. THE EMERGENCY LIGHT UNSWITCHED ACTIVE / GENERAL LIGHTING SWITCHED ACTIVE CIRCUIT ARRANGEMENT AND CONTROL IS TYPICAL FOR ALL CIRCUITS SUPPLYING EMERGENCY LIGHTS.

2. PROVIDE ADDITIONAL CONTROL RELAYS (CRx) CONFIGURED AS PER CRa AND CRb FOR ALL ADDITIONAL LIGHTING CIRCUITS THAT SUPPLY LIGHTS IN THE VICINITY OF THE EMERGENCY LIGHTS.

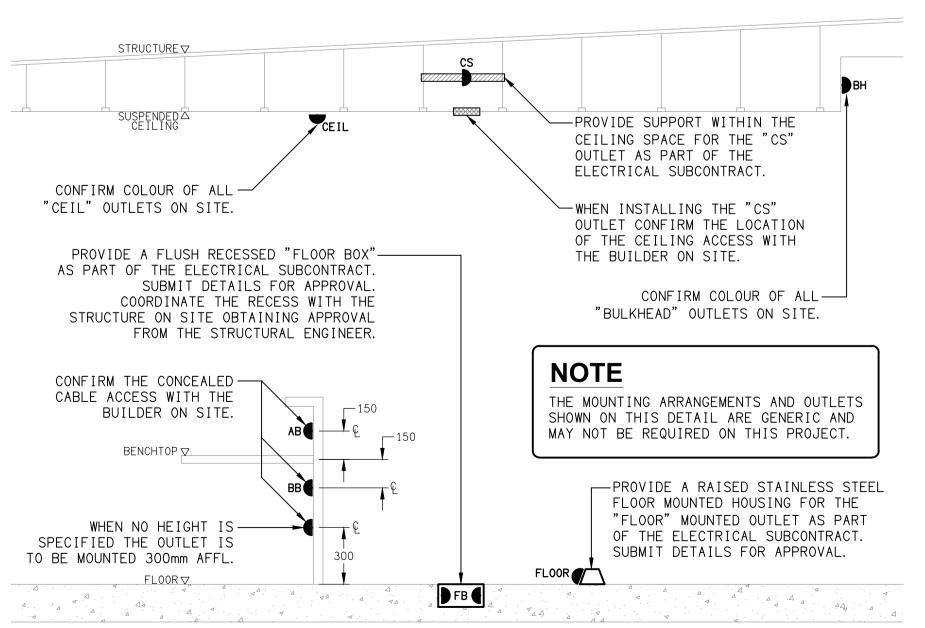

DETAIL TYPICAL OUTLET MOUNTINGS NOT TO SCALE

THE COPYRIGHT OF THIS DRAWING REMAINS THE PROPERTY OF THE ELECTRICAL DESIGN GROUP.

USE FIGURED DIMENSIONS IN PREFERENCE TO SCALE.

ALL DIMENSIONS TO BE VERIFIED ONSITE.

B | TENDER 29/07/2025 REV: DESCRIPTION: DATE:

ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

Email: brisbane@edg.net.au

Web: www.edg.net.au

P.O. Box 15 Sherwood Qld 4075 Phone: (07) 3278 4375

TRADING AS:

GROUP

ELECTRICAL DESIGN

SHEET SIZE:

ACN 092 710 793

PROJECT:

BRISBANE:

OXENFORD TAVERN

SITE ADDRESS:

179 OLD PACIFIC HIGHWAY, OXENFORD, QUEENSLAND

NOT TO SCALE

ат **А1**

DRAWING TITLE:

ELECTRICAL SERVICES LEGEND & DETAILS

DRAWING NO:

C3585a

E01



REVISION: