

BEGA**44 568**

Ceiling · Wall · Pillar luminaire



Project · Reference number

Date

Product data sheet

Application

Unshielded luminaire for installation under ceilings, on walls as well as on pillars and murals. By means of the three-ply opal glass the light is distributed softly and uniformly over the glass surface.

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel
 BEGA Unidure® coating technology
 Colour graphite or bronze
 Opal glass with screw neck
 2 mounting holes $\varnothing$ 4.8 mm
 Distance apart 50 mm
 2 cable entries for through-wiring of mains supply cable $\varnothing$ 7-10.5 mm
 Connection terminal 2.5²
 Earth conductor connection
 Lampholder E 27
 Safety class I
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK02
 Protection against mechanical impacts < 0.2 joule
 – Safety mark
 – Conformity mark
 Weight: 1.4 kg

Lamp

Luminaire with screw base E 27
 Lamp output max. 60 W
 This product contains light source of energy efficiency class C

Supplied lamp

BEGA LED lamp **13584**

LED Retrofit 4.8 W · 805 lm · 3000 K

Luminaire efficiency: 86%

Additional BEGA LED lamps are available for this luminaire:

13586 LED 4.8 W · 805 lm · 3000 K
 dimmable

13588 LED 6,5 W · 1055 lm · 3000 K

13590 LED 9 W · 1520 lm · 3000 K

13592 LED 9 W · 1520 lm · 3000 K
 dimmable



Radio-controlled version (Zigbee 3.0):

13555 LED 9 W · 805 lm · 2700 K
 dimmable

13556 LED 9 W · 805 lm · 2700-6500 K
 dimmable · tunable white

13557 LED 9.5 W · 805 lm · 1800-6500 K
 dimmable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

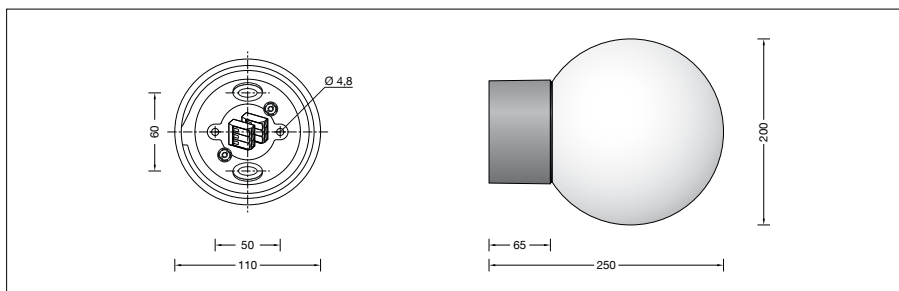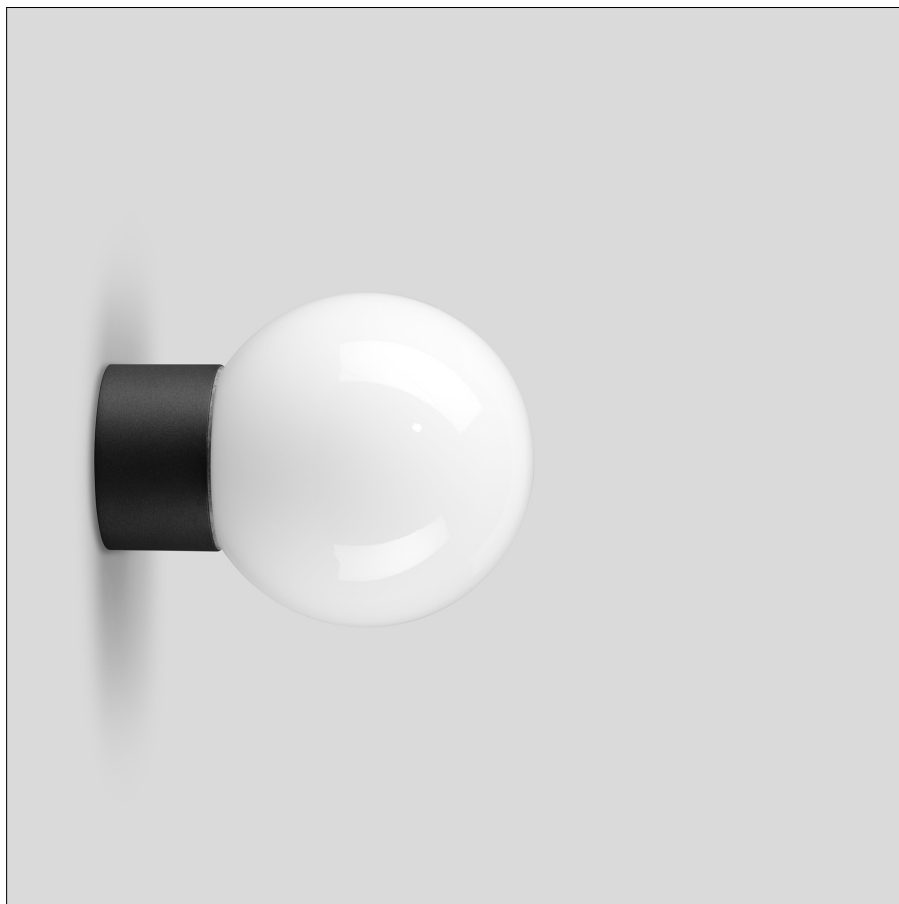

Ratio of luminous flux

Luminous flux upper half-space	45,7 %
Luminous flux lower half-space	54,3 %

BUG rating according to IES TM-15-20:
 0-3-1

CEN Flux Code according to EN 13032-2:
 25-50-75-54-86-20-45-71-46

Lighting technology

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at www.bega.com.

Article No. 44 568

Colour graphite or bronze
 graphite – article number
 bronze – article number + **B**